



BRAND

PureEdge Lighting

DESCRIPTION

Lazer Line is a 24VDC Direct/Indirect (uplight and downlight) Dynamic/Tunable White LED Lighting System providing general illumination for architectural applications. The field-cutable dual strip channel is sold in 5 foot increments with 10 watts per foot (5 watts up/5 watts down) in Dynamic/Tunable White 2K6K (2000K-6500K) color temperature and downlight in a variety of color temperature options. Finish in White or Satin Black. Product is built to order. System includes Lazer Line Channel (LZUD), Lazer Line Tape, and one pair of turnbuckles. Additional turnbuckles needed and standoff(s) are sold separately. System can be run up to 20 feet with two power feeds at one end or 40 feet with power feeds at both ends. Note: A DMX 2XK color changing power supply or 2XK 2-channel 0-10V power supply is required and sold separately. 0-10V power supply requires two dimmers --one for intensity and one for color temperature. DMX power supply must be used with PureEdge controller (CDMX1-2XK).




SHADE COLOR	N/A
BODY FINISH	Satin Aluminum
WATTAGE	50W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 0.44"W
INTEGRATED LED MODULE	
LAMP	5 x LED/10W/24V LED

Technical Information

LAMP LIFE	50000 hours
-----------	-------------

SPEC #	EDG1125624
--------	------------

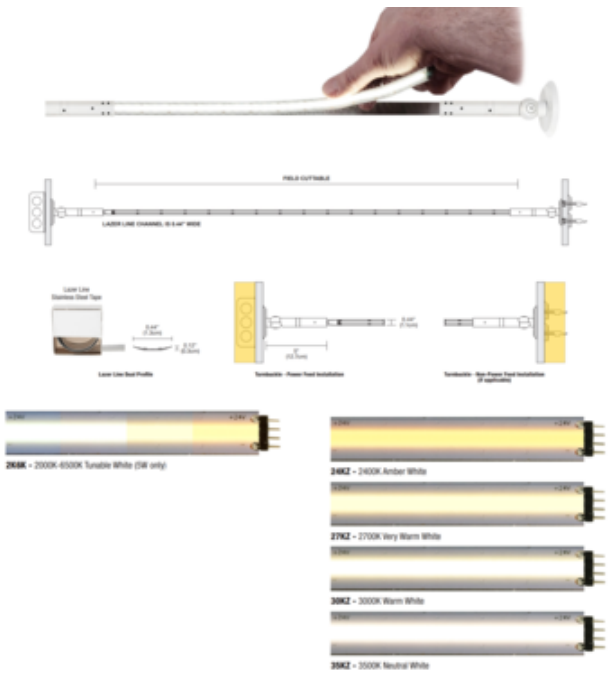

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE