

Lightology

lightology.com
866-954-4489
03-04-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1125625**
 Approved On: _____ Approved By: _____

Lazer Line Tunable White Up+Down Suspended Lighting System

By PureEdge Lighting



Description


Lazer Line is a 24VDC Direct/Indirect (uplight and downlight) LED Lighting System providing general illumination for architectural applications. The field-cutttable dual strip channel is sold in 1 inch increments with 10 watts per foot (5 watts up/5 watts down) in Dynamic/Tunable White 2K6K (2000K-6500K) color temperature and downlight in a variety of color temperature options. System can be run up to 20 feet with power feed at one end, or 40 feet with power feeds at both ends. The 4 inch round turnbuckles allow Lazer Line to be positioned 0-90 degrees relative to the mounting surface, creating a 3-dimensional appearance. Mounts to standard 4 inch square junction box with round plaster ring. Paint canopy to blend into wall for a seamless look. Note: A DMX 2XK color changing power supply or 2XK 2-channel 0-10V power supply is required and sold separately. 0-10V power supply requires two dimmers --one for intensity and one for color temperature. DMX power supply must be used with PureEdge controller. Product is built to order

Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	50W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 0.44"W
INTEGRATED LED MODULE	5 x LED/10W/24V LED

Technical Information

LAMP LIFE	50000 hours
-----------	-------------

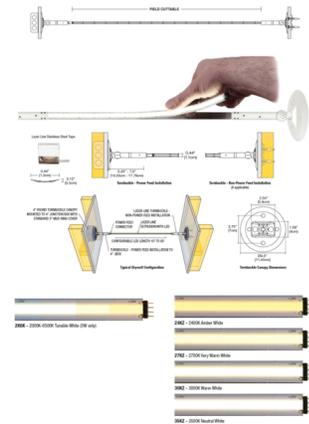

Notes: