Lightology

lightology.com
866-954-4489
10-30-26

Project:

Company:

Location: Fixture Type:

SPEC #: **LCF1158496**

Approved On: Approved By:

Atomos 2 Round Adjustable Trimless / IC Airtight Housing


By Lucifer Lighting

Description

The Atomos 2 Round Adjustable Trimless Recessed Ceiling Light with New Construction IC Airtight Housing features a low profile that is perfect for residential, retail or commercial spaces. The adjustable light may be angled up to 30 degrees. The powdercoated aluminum baffle is available in a variety of colors to complement any interior. Includes a soft focus lens. Available with 15 or 50 degree beam angle in 2700K, 3000K, or Warm Dim (3000K - 1800K) color temperatures. Integral 120 volt LED driver dimmable with an electronic low voltage (ELV) or Triac dimmer to 1%.



Shown in white powdercoat

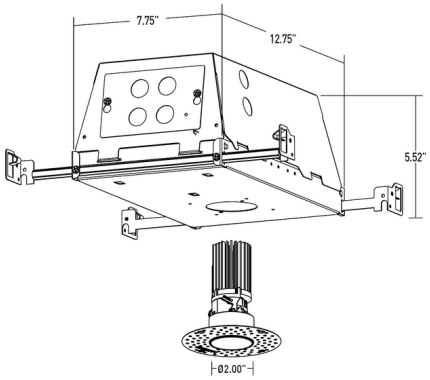

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White Powdercoat
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.75"L x 7.75"W x 5.52"H
INTEGRATED LED MODULE	1 x LED/12W/120V LED

Technical Information

PRODUCT DIMENSIONS	Ceiling Thickness: 0.5" - 2"
APERTURE SIZE	2.000"
APERTURE SHAPE	Round
HOUSING HEIGHT	6"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	15°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	61.67
LUMINOUS FLUX	740 lumens

CLICK TO VIEW PRODUCT

Notes: