




BRAND

CSL

DESCRIPTION

The ECO 5 Inch New Construction Housing is IC rated and fits into drywall and T-bar grid ceilings. Features a 120/277V phase control driver offering 1%-100% TRIAC or ELV dimming and delivering up to 1575 lumens. Available in three color temperature options. ECO 5 includes a fixed 50 degree optic for general task and accent lighting with minimal glare. Insert up to two lenses for additional light control, sold separately. ECO 5 pairs with a variety of trim styles and colors (round and square, with flange and flangeless) for a clean ceiling aesthetic. Rated for wet locations when used with a wet location trim. Note: A complete fixture requires a housing, trim, (and mud-in plate for flangeless), sold separately.

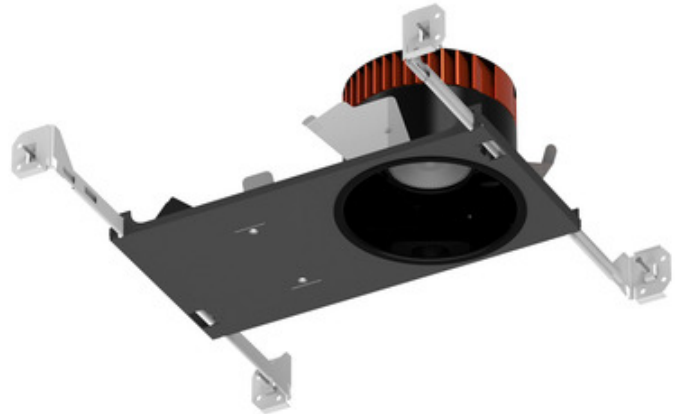


Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	16W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"W x 4.13"H x 6"D
INTEGRATED LED MODULE	
LAMP	1 x LED/16W/120-277V LED

Technical Information

LUMINOUS FLUX	1268 lumens
LUMENS/WATT	79.25
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	50°
LAMP LIFE	55000 hours
HOUSING TYPE	New construction IC

SPEC # CSL1160448

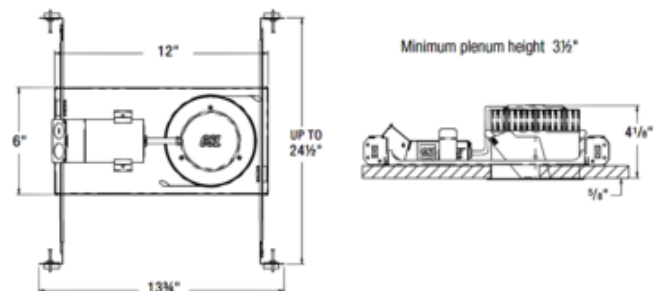

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE