

# Lightology

lightology.com  
866-954-4489  
02-19-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **OKT1165824**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## T-Grid Linear Light

By OKT Lighting



### Description

The T-Grid Linear Light is a simple, easy-to-install grid lighting system. Compatible with 9/16 inch and 15/16 inch T-grid ceiling systems, this stylish linear fixture can simply replace cross tees where lighting is desired, seamlessly integrating into the ceiling grid. LED light shines through a three-sided milky diffuser with a 120 degree beam angle. This fixture provides a flexible ambient lighting solution for commercial and institutional environments such as offices, classrooms, retail settings and public spaces. Three options are available based on grid type compatibility: 9/16 inch Flat, 9/16 inch Slot and 15/16 inch Flat. Note: Up to three 2 foot lights can be connected in parallel to one 30W driver, and up to three 4 foot lights can be connected in parallel to one 60W driver. The maximum distance from fixture to driver is 8 feet with a 24AWG cable. Note: A required remote driver and optional accessories sold separately.

### Specifications


COLOR . . . . . Milky  
BODY FINISH . . . . . Anodized Silver  
WATTAGE . . . . . 10W  
DIMMER . . . . . 0-10V  
DIMENSIONS . . . . . 23.98"L x 0.56"W x 0.78"H  
INTEGRATED LED MODULE . . . . . 1 x LED/10W/120-277V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 80 CRI  
LAMP COLOR . . . . . 3500K  
LUMENS/WATT . . . . . 116.00  
LUMINOUS FLUX . . . . . 1160 lumens



Shown in anodized silver / milky

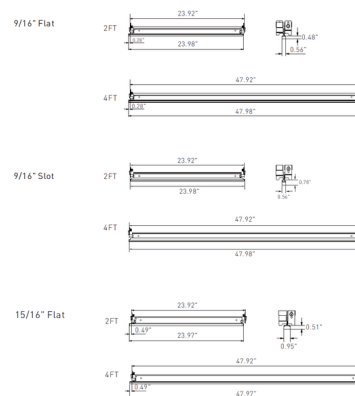

CLICK TO VIEW PRODUCT

Notes: