Lightology

lightology.com
866-954-4489
11-09-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EUF1188770**

Approved On: Approved By:

Amigo 3 inch Multiples Trimless Downlight / Remodel Housing


By Eurofase

Description

The Amigo 3 Inch Multiples Trimless Downlight with Remodel Housing is built with an 18 gauge powder coated steel housing. A steel mesh plate and ERP 3-in-1 dimmable driver are included. TRIAC and ELV dimming at 120V. 0-10V dimming at 277V. Optional new construction Non-IC mounting plate and new construction IC housing sold separately. Minimum Height Clearance: 9.5 inchDriver IncludedMax Ceiling Thickness: 1.5 inch



Shown in black

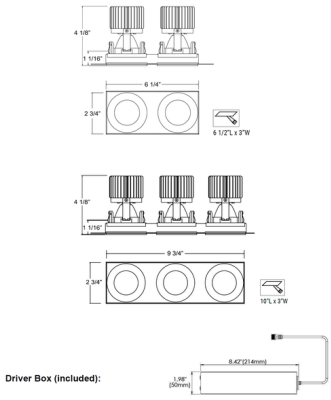

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	30W
DIMMER	Low Voltage Electronic
DIMENSIONS	6.25"W x 4.125"H x 2.75"D
INTEGRATED LED MODULE	2 x LED/15W/120-277V LED

Technical Information

APERTURE SHAPE	Rectangular
HOUSING HEIGHT	5"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Downlight
BEAM ANGLE	40°
COLOR RENDERING	90 CRI
LAMP COLOR	3000K
LUMENS/WATT	139.87
LUMINOUS FLUX	2098 lumens

CLICK TO VIEW PRODUCT

Notes: