Lightology

lightology.com
866-954-4489
11-09-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EUF1188839**

Approved On: Approved By:

Amigo 6 inch Multiples Trimless Downlight / Remodel Housing


By Eurofase

Description

The Amigo 6 Inch Multiples Trimless Downlight with Remodel Housing is built with an 18 gauge powder coated steel housing. A steel mesh plate and ERP 3-in-1 dimmable driver is included. 40 degree beam angle. 30 degree tilt. TRIAC and ELV dimming at 120V. 0-10V dimming at 277V. Optional new construction Non-IC mounting plate and new construction IC housing are sold separately.Minimum Height Clearance: 9.5 inchDriver IncludedMax Ceiling Thickness: 1.5 inch



Shown in white

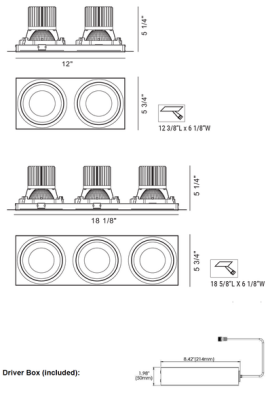

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	52W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"W x 5.25"H x 5.75"D
INTEGRATED LED MODULE	2 x LED/26W/120-277V LED

Technical Information

APERTURE SHAPE	Rectangular
HOUSING HEIGHT	6"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Downlight
BEAM ANGLE	40°
COLOR RENDERING	90 CRI
LAMP COLOR	3000K
LUMENS/WATT	151.31
LUMINOUS FLUX	3934 lumens

CLICK TO VIEW PRODUCT

Notes: