Lightology

lightology.com
866-954-4489
10-30-26

Project:

Company:

Location: Fixture Type:

SPEC #: **LCF1204317**

Approved On: Approved By:

# Atomos 1 Slim Round Pinhole Trim Wood / IC Airtight Housing


By Lucifer Lighting

## Description

The Atomos 1 Slim Round Pinhole Downlight Trim for Wood Ceilings with New Construction IC Airtight Housing features a low profile trim and slim housing that is perfect for residential, retail or commercial spaces. The zero sightline trim and powdercoated aluminum baffle complement any interior. Includes a soft focus lens. Available with 15 or 50 degree beam optic in 2700K, 3000K, or Warm Dim (3000K - 1800K) color temperatures. Integral 120 volt LED driver dimmable with an electronic low voltage (ELV) or Triac dimmer to 1%.



Shown in black / black baffle

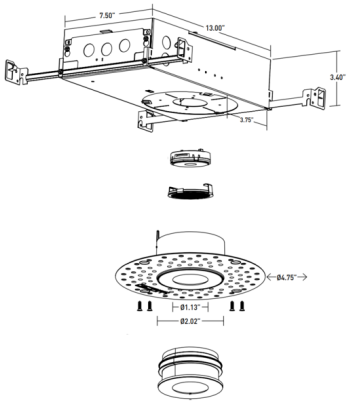


### Specifications

| | |
|---|---|
| REFLECTOR/BAFFLE COLOR | N/A |
| BODY FINISH | Black / Black Baffle |
| WATTAGE | 15W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 13"L x 7.5"W x 3.4"H |
| INTEGRATED LED MODULE | 1 x LED/15W/120V LED |

### Technical Information

| | |
|---|---|
| APERTURE SIZE | 1.000" |
| APERTURE SHAPE | Pinhole |
| HOUSING HEIGHT | 3.5" |
| HOUSING TYPE | New construction IC Airtight |
| CEILING TYPE | Wood |
| FUNCTION | Downlight |
| LAMP LIFE | 50000 hours |
| BEAM ANGLE | 15° |
| COLOR RENDERING | 90 CRI |
| LAMP COLOR | 2700K |
| LUMENS/WATT | 41.13 |
| LUMINOUS FLUX | 617 lumens |

CLICK TO VIEW PRODUCT

Notes: