

Lightology

lightology.com
866-954-4489
07-01-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **WAC1206035**
 Approved On: _____ Approved By: _____

FQ 2 inch 15W Shallow Round Trim Downlight By WAC Lighting



Description

The FQ 2 Inch 15W Shallow Round Trim Downlight is designed for use with FQ 2IN Series of recessed housings by WAC Lighting. This high performance LED luminaire will provide quality lighting in both commercial and residential settings. The trim ships with a 25 degree reflector pre-installed, but also includes field-changeable 40 and 55 degree reflectors for a wider beam angle. A 30 degree shielding angle provides superior glare control. Accommodates 0.5 to 1 inch ceiling thickness. Dimmable 100% to 1% with ELV, TRIAC, and 0-10V dimmers. Note: The Warm Dim luminaire is not available with 25 degree beam spread. It is shipped with a 40 degree reflector pre-installed and includes a field-changeable 50 degree reflector. A complete fixture requires the trim and a housing, sold separately.

Specifications


| | |
|------------------------|--------------------------|
| REFLECTOR/BAFFLE COLOR | N/A |
| BODY FINISH | Haze |
| WATTAGE | 15W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 4"W x 3.88"H |
| INTEGRATED LED MODULE | 1 x LED/15W/120-277V LED |

Technical Information

| | |
|-----------------|-------------------|
| APERTURE SHAPE | Round |
| CEILING TYPE | Drywall with Trim |
| FUNCTION | Downlight |
| LAMP LIFE | 50000 hours |
| BEAM ANGLE | 25° |
| COLOR RENDERING | 90 CRI |
| LAMP COLOR | 2700K |
| LUMENS/WATT | 79.33 |
| LUMINOUS FLUX | 1190 lumens |



Shown in haze

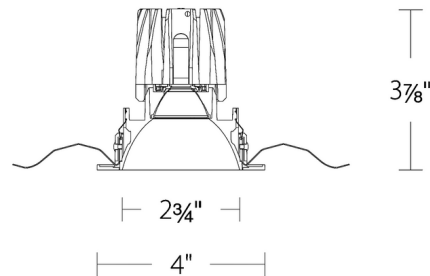

CLICK TO VIEW PRODUCT

Notes: