

Lightology

lightology.com
866-954-4489
04-25-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **EDG1244779**

Approved On: _____ Approved By: _____

TruLine .5A TruColor™ RGBTW Plaster-In LED System

By PureEdge Lighting



Description

Truline with TruColor RGB & Tunable White (RGBTW) is a new offering in the family of plaster-in 24VDC systems that recesses within 5/8 inch drywall without any framing modification required. Redefining the relationship between lighting and interior design, this innovative system blends seamlessly into the drywall, becoming part of the architecture. The TruColor RGBTW light engine with Pure Smart TruColor technology utilizes five channels of tunable LEDs in Red, Blue, Green, and Tunable White (1500K-6500K). With propriety color mixing, TruLine RGBTW gives access to the warm glow of the sunset (1500K-2400K golden hour) to the pure white light of the mid-day sun (5700K) and everything in between. Dynamic color changing functionality provides millions of possibilities for customization. The power feed included with TruLine contains a 5-channel WiZ Pro CV Bridgebox allowing for wireless color of the luminaire with the WiZ Pro software suite and Pure Smart Wi-Fi room controller. The slim extrusion, LED strip, and lens are field-cuttable. Can be ordered in 1 foot increments (up to 20 feet before re-feeding). RGBTW strip offered in 5W5: 5W RGB & 5W Tunable White, 5 watts total per foot and 5W7: 5W RGB & 7W Tunable White, 7 watts total per foot. TruLine can be installed on a single surface, join runs on multiple planes from wall to ceiling, or from one wall to an adjacent wall. With the ability to run in vertical, horizontal, and diagonal directions, the compositions are truly endless. Note: Required remote power supply sold separately.

Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	20W
DIMMER	N/A
DIMENSIONS	48"L x 2.65"W x 0.63"H
INTEGRATED LED MODULE	4 x LED/5W/24V LED



Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	97 CRI
LAMP COLOR	RGB+White
LUMENS/WATT	180.80
LUMINOUS FLUX	904 lumens

Notes:



Shown in white

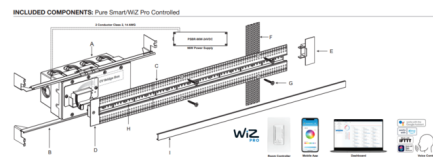

- INCLUDED COMPONENTS:** Pure Smart/WiZ Pro Controlled
- A. 4 GANG JUNCTION BOX WITH CV BRIDGE BOX**
TL5A WIZ-PRO-RGBTW (INCLUDED)
Mounts to the framing with the included Adjustable Mounting Bars. 24VDC, Class 2, low voltage wire from RGBTW remote Power Supply connect to input wires on the CV Bridgebox inside the box. Low Voltage 24VDC wires from Remote Power Supply connect to input wires from bridgebox wires inside box. Junction Box opening is covered by the included mounting plate and channel. Junction box is necessary for electrical rough-in prior to Truline channel installation. Junction Box and CV Bridgebox are included with each Truline RGBTW complete fixture.
 - B. ADJUSTABLE MOUNTING BARS**
Provide flexibility for mounting in a variety of spaces and orientations. May be secured to studs that are spaced 12"-24" apart.
 - C. TRULINE AS CHANNELS**
5/8" deep extrusion houses single row of LED Strip.
 - D. POWER END CAP**
Provides a friction lock and prevents light leak at the feed-end of a run where LED Strip enters channel.
 - E. TRAIL-UP BOX**
Prevents dark spots at the end of a run by tucking excess LED Strip safely behind the wall.
 - F. MOUNTING STRAP**
Secures channel to drywall when wall stud is unavailable.
 - G. DRYWALL SCREW**
Secures channel to drywall and stud.
 - H. LED STRIP**
Your selection of LED Strip CCT.
 - I. LENS**
0.5" wide diffused white lens projects a clean line of light without pulsation.



CLICK TO VIEW PRODUCT