

Lightology

lightology.com
866-954-4489
01-15-26

Project:

Company:

Location:

Fixture Type:

SPEC #: EDG1244779

Approved On:

Approved By:

TruLine .5A TruColor™ RGBTW Plaster-In LED System

By PureEdge Lighting



Description

TruLine with TruColor RGB & Tunable White (RGBTW) is a new offering in the family of plaster-in 24VDC systems that recesses within 5/8 inch drywall without any framing modification required. Redefining the relationship between lighting and interior design, this innovative system blends seamlessly into the drywall, becoming part of the architecture. The TruColor RGBTW light engine with Pure Smart TruColor technology utilizes five channels of tunable LEDs in Red, Blue, Green, and Tunable White (1500K-6500K). With proprietary color mixing, TruLine RGBTW gives access to the warm glow of the sunset (1500K-2400K golden hour) to the pure white light of the mid-day sun (5700K) and everything in between. Dynamic color changing functionality provides millions of possibilities for customization. The power feed included with TruLine contains a 5-channel WiZ Pro CV Bridgebox allowing for wireless color of the luminaire with the WiZ Pro software suite and Pure Smart Wi-Fi room controller. The slim extrusion, LED strip, and lens are field-cuttable. Can be ordered in 1 foot increments (up to 20 feet before re-feeding). RGBTW strip offered in 5W5: 5W RGB & 5W Tunable White, 5 watts total per foot and 5W7: 5W RGB & 7W Tunable White, 7 watts total per foot. TruLine can be installed on a single surface, join runs on multiple planes from wall to ceiling, or from one wall to an adjacent wall. With the ability to run in vertical, horizontal, and diagonal directions, the compositions are truly endless. Note: Required remote power supply sold separately.

Specifications


| | |
|-----------------------|---------------------------|
| COLOR | N/A |
| BODY FINISH | White |
| WATTAGE | 20W |
| DIMMER | N/A |
| DIMENSIONS | 48" L x 2.65" W x 0.63" H |
| INTEGRATED LED MODULE | 4 x LED/5W/24V LED |

Technical Information

| | |
|-----------------|-------------|
| LAMP LIFE | 50000 hours |
| COLOR RENDERING | 97 CRI |
| LAMP COLOR | RGB+White |
| LUMENS/WATT | 180.80 |
| LUMINOUS FLUX | 904 lumens |



Shown in white

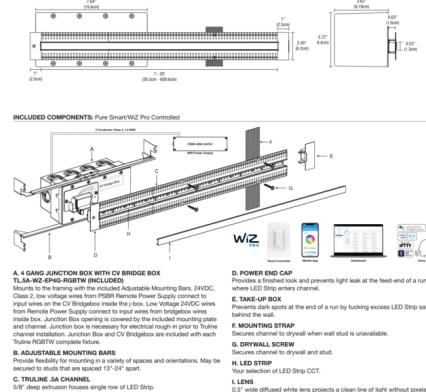

CLICK TO VIEW PRODUCT

Notes: