

Lightology

lightology.com
866-954-4489
04-04-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG126771**
 Approved On: _____ Approved By: _____

Cirrus Ceiling T1 Lens Downlight w/ Remote Power By PureEdge Lighting



Description

Cirrus Ceiling Channel T1 Lens Downlight with Remote Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 480 inches, features a tubular lens with 176 degree beam, three wattage options, and a spectrum of color temperature options. Chrome finish available up to 84 inch length. Includes a 4.6 inch square canopy that mounts on a standard junction box. Mounting clips (CC-MCL) are included for use every 18 inches. Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Note: Required power supply, dimmer control, and optional accessories sold separately.

Specifications


COLOR White
 BODY FINISH Satin Aluminum
 WATTAGE 2W
 DIMMER Low Voltage Electronic
 DIMENSIONS 12"L x 1.125"W x 1.4"H
 INTEGRATED LED MODULE 1 x LED/2W/24V LED

Technical Information

LAMP LIFE 50000 hours
 BEAM ANGLE 100°
 COLOR RENDERING 95 CRI
 LAMP COLOR 2700K



Shown in satin aluminum / white

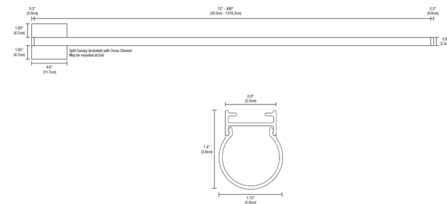

CLICK TO VIEW PRODUCT

Notes: