

Lightology

lightology.com
866-954-4489
04-24-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1355425**
 Approved On: _____ Approved By: _____

Cirrus Wall Wash Suspension w/ Glare Shield Remote Power

By PureEdge Lighting



Description

The new generation of the Cirrus Suspension Wall Wash with Glare Shield is precision-engineered to block glare and illuminate vertical surfaces from the top of the ceiling to the floor at a 3.3:1 ratio. The diffused asymmetric wall wash lens creates a smooth and uniform beam spread. Available in 5, 7 or 10 watts per foot, with designer-grade up to 95+ CRI LEDs rendering art and colors in their truest forms. Includes adjustable 12ft coaxial cables (additional aircraft cables included for support when fixture exceeds 96 inches). Powered by Class 2, 24VDC remote power supplies or a 60W ELV power supply that fits within the junction box (ordered separately).

Specifications


COLOR	N/A
BODY FINISH	Satin Nickel
WATTAGE	20W
DIMMER	Low Voltage Electronic
DIMENSIONS	49"L x 0.9"W x 1.25"H
INTEGRATED LED MODULE	4 x LED/5W/24V LED

Technical Information

PRODUCT DIMENSIONS	Cord Length: 144"
LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K
LUMENS/WATT	255.20
LUMINOUS FLUX	1276 lumens



Shown in satin nickel

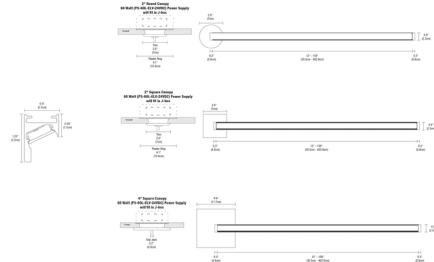

CLICK TO VIEW PRODUCT

Notes: