

# Lightology

lightology.com  
866-954-4489  
04-23-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG1358132**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Truline Trim 1.6A Tunable White 24VDC LED System By PureEdge Lighting



### Description


The TruLine Trim 1.6A is a recessed 24VDC LED system that features a paintable half-inch trim. The slim channel extrusions recess within any flat surface, including 5/8 inch drywall, tile, and millwork, eliminating the need for stud or joist modification. The channel, LED strips, and lenses are field-cutable and ordered in 1' increments (up to 40' before re-feeding), providing flexibility and unparalleled ease of installation. Truline Trim 1.6A with Tunable White 2000K-6500K (2K6K) grants independent control and adjustment of color temperature and intensity from 2000K (Sunset) through 6500K (Day Light White). Tunable white lighting visually, biologically and emotionally contributes to human interaction with the physical world. Human centric lighting (HCL) builds on this technology bringing the dynamics of natural daylight indoors, and delivering a positive effect on human health, wellbeing and performance. Note: A DMX color changing power supply or 2XK 0-10V 2-Channel power supply is required and sold separately. 0-10V requires two dimmers --one for intensity and one for color temperature. DMX power supply must be used with PureEdge controller (CDMX1-2XK). Coordinate installation with electrical and drywall contractors.

### Specifications



COLOR	N/A
BODY FINISH	White
WATTAGE	30W
DIMMER	Low Voltage Electronic
DIMENSIONS	72"L x 2.82"W
INTEGRATED LED MODULE	6 x LED/5W/24V LED

### Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	91 CRI
LAMP COLOR	2000K-6000K Tunable White
LUMENS/WATT	231.60
LUMINOUS FLUX	1158 lumens

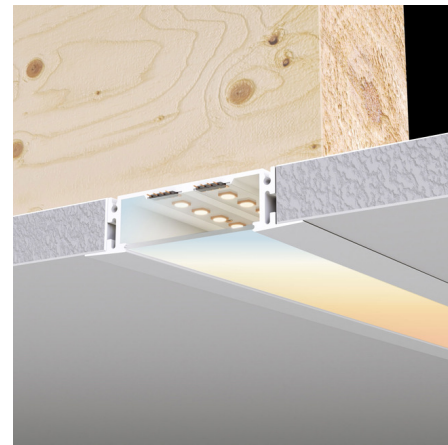

Shown in white

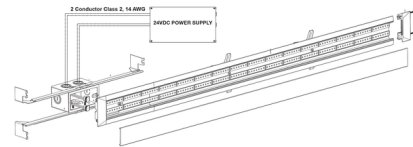

CLICK TO VIEW PRODUCT

Notes: