Lightology

lightology.com
866-954-4489
10-30-26

Project:

Company:

Location: Fixture Type:

SPEC #: **WAC1362268**

Approved On: Approved By:

FQ 4 inch Square Warm Dim Trimless Wall Wash

By WAC Lighting

Description

The FQ 4 Inch Square Warm Dim Trimless Wall Wash Trim is designed for use with FQ 4 Inch Series of recessed housings by WAC Lighting. This high performance LED luminaire will evenly illuminate a wall horizontally and vertically, and it is suitable for both commercial and residential applications. Designed for even wall illumination both vertically and horizontally. Warm Dim 3000K-1800K color temperature. Ceiling cutout: 4.75 inch. Accommodates 0.5 to 1 inch ceiling thickness. Dimmable 100% to 1% with ELV, TRIAC at 120V, and 0-10V dimmers at 277V.Note: A complete fixture requires the trim and a housing, sold separately. Compatible with 13 watt and 19 watt housings.

Specifications


COLOR	N/A
BODY FINISH	Black
WATTAGE	N/A
DIMMER	Low Voltage Electronic
DIMENSIONS	3"W x 5.63"H
INTEGRATED LED MODULE	LED/120-277V LED

Technical Information

APERTURE SIZE	3.000"
APERTURE SHAPE	Square
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Wall Washer
LAMP LIFE	50000 hours
COLOR RENDERING	90 CRI
LAMP COLOR	3000K Warm Dim
LUMINOUS FLUX	950 lumens



Shown in black

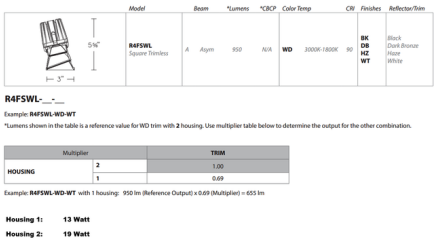

Model	Beam	*Lumens	*CBCP	Color Temp	CRI	Finishes	Reflector/Trim
R4FSWL Square Trimless	A	Asym	950	N/A	WD 3000K-1800K	90	BK DB HZ WT	Black Dark Bronze Haze White

R4FSWL-__-__

Example: **R4FSWL-WD-WT**

*Lumens shown in the table is a reference value for WD trim with **2** housing. Use multiplier table below to determine the output for the other combination.

Multiplier		TRIM
HOUSING	2	1.00
	1	0.69

Example: **R4FSWL-WD-WT** with 1 housing: 950 lm (Reference Output) x 0.69 (Multiplier) = 655 lm

Housing 1: **13 Watt**
Housing 2: **19 Watt**

CLICK TO VIEW PRODUCT

Notes: