

Lightology

lightology.com
866-954-4489
04-14-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1388883**
 Approved On: _____ Approved By: _____

Luca 3.5 inch Static White Non-IC New Construction Frame

By PureEdge Lighting



Description

New Construction Non-IC Mounting Frame with 120V driver designed for use with PureEdge Lighting Luca 3.5 inch Static White downlights. NOTE: A complete fixture requires a trim and housing, sold separately (see trim for color temperature and beam angle options). Available in 120V option (Universal Dimming TRIAC/ELV: 100% to 3%), 120-277V option (0-10V Dimming: 100% to 0.1% dim to off), or 120-277V DALI 2. LUMEN OUTPUT: 16 Watt = 980 Lumens (Wall Wash), 850 Lumens (Warm Dim), 1343 Lumens (Fixed/Adjustable) 20 Watt = 1175 Lumens (Wall Wash), 1026 Lumens (Warm Dim), 1610 Lumens (Fixed/Adjustable) 24 Watt = 1315 Lumens (Wall Wash), 1202 Lumens (Warm Dim), 1802 Lumens (Fixed/Adjustable) 26 Watt = 1542 Lumens (Wall Wash), 2113 Lumens (Fixed/Adjustable)

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Galvanized
WATTAGE	20W
DIMMER	Low Voltage Electronic
DIMENSIONS	11.63"W x 1.43"H x 14.12"D
INTEGRATED LED MODULE	1 x LED/20W/120V LED

Technical Information

HOUSING HEIGHT	6"
HOUSING TYPE	New Construction NON IC



Shown in galvanized

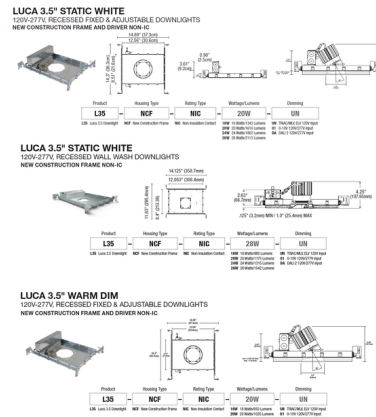

CLICK TO VIEW PRODUCT

Notes: