

Lightology

lightology.com
866-954-4489
07-05-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **WAC1425013**
Approved On: _____ Approved By: _____

Ocularc 2IN Round Color-Select Adjustable Trim with Housing By WAC Lighting



Description

The Ocularc 2 Inch Round Adjustable Downlight features a shallow IC Airtight New Construction Housing with driver and is designed to fit in tight plenum spaces. Can be vertically adjusted between 0-35 degrees. Compatible with ceiling thickness of 0.5-1.5 inches. Cutout: 3 1/16 inch. IC Rated: suitable for direct contact with insulation. Ocularc includes a color-select switch which allows user to field select between 2700K, 3000K, 3500K, 4000K and 5000K color temperature options. Includes TIR lens. TRIAC and ELV dimming at 120V. 0-10V dimming at 277V. NOTE: Sold as new construction, but may be reconfigured in the field for remodel.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Brushed Nickel
WATTAGE	11W
DIMMER	Low Voltage Electronic
DIMENSIONS	3.5"W x 3.88"H
INTEGRATED LED MODULE	1 x LED/11W/120-277V LED

Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	4"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	CCT Select
LUMENS/WATT	78.18
LUMINOUS FLUX	860 lumens



Shown in brushed nickel

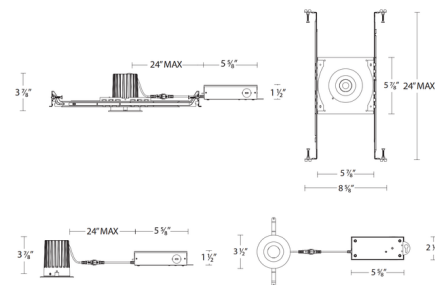

CLICK TO VIEW PRODUCT

Notes: