

Lightology

lightology.com
866-954-4489
04-26-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **WAC1425059**
 Approved On: _____ Approved By: _____

Ocularc 3 inch Round Warm Dim Adjustable Trim with Housing By WAC Lighting



Description

The Ocularc 3 Inch Round Warm Dim Adjustable Trim features a shallow IC Airtight New Construction Housing with driver and is designed to fit in tight plenum spaces. Can be vertically adjusted between 0-35 degrees. Compatible with ceiling thickness of 0.5-1.5 inches. Cutout: 4.25 inch. IC Rated: suitable for direct contact with insulation. Dim-to-warm color temperature range: 3000K-1800K. Includes TIR lens. TRIAC and ELV dimming at 120V. 0-10V dimming at 277V. NOTE: Sold as new construction, but may be reconfigured in the field for remodel.

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	11W
DIMMER	Low Voltage Electronic
DIMENSIONS	4.75"W x 3.88"H
INTEGRATED LED MODULE	1 x LED/11W/120-277V LED


Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	4"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	19°
COLOR RENDERING	95 CRI
LAMP COLOR	3000K Warm Dim
LUMENS/WATT	67.73
LUMINOUS FLUX	745 lumens



Shown in white

Sold as New Construction, may be reconfigured in the field for Remodel

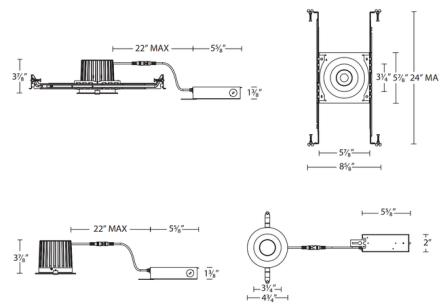

CLICK TO VIEW PRODUCT

Notes: