

# Lightology

lightology.com  
866-954-4489  
05-18-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **WAC1425095**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Ocularc 3 inch Square Warm Dim Adjustable Trim with Housing By WAC Lighting



### Description

The Ocularc 3 Inch Square Warm Dim Adjustable Trim features a shallow IC Airtight New Construction Housing with driver and is designed to fit in tight plenum spaces. Can be vertically adjusted between 0-35 degrees. Compatible with ceiling thickness of 0.5-1.5 inches. Cutout: 4.25 inch. IC Rated: suitable for direct contact with insulation. Dim-to-warm color temperature range: 3000K-1800K. Includes TIR lens. TRIAC and ELV dimming at 120V. 0-10V dimming at 277V. NOTE: Sold as new construction, but may be reconfigured in the field for remodel.

### Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	11W
DIMMER	Low Voltage Electronic
DIMENSIONS	4.75"W x 3.88"H x 4.75"D
INTEGRATED LED MODULE	1 x LED/11W/120-277V LED


### Technical Information

APERTURE SHAPE	Square
HOUSING HEIGHT	4"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	19°
COLOR RENDERING	95 CRI
LAMP COLOR	3000K Warm Dim
LUMENS/WATT	67.73
LUMINOUS FLUX	745 lumens



Shown in white

Sold as New Construction, may be reconfigured in the field for Remodel

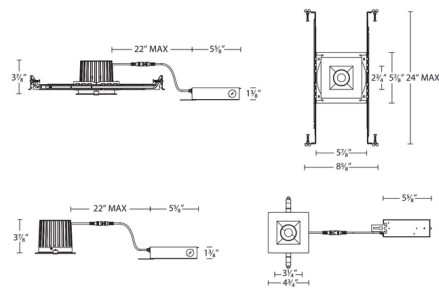

CLICK TO VIEW PRODUCT

Notes: