

Lightology

lightology.com
866-954-4489
07-01-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **WAC1425098**

Approved On: _____ Approved By: _____

Ocularc 3 inch Square Color-Select Adjustable Trim with Housing By WAC Lighting



Description

The Ocularc 3 Inch Square Adjustable Downlight features a shallow IC Airtight New Construction Housing with driver and is designed to fit in tight plenum spaces. Can be vertically adjusted between 0-35 degrees. Compatible with ceiling thickness of 0.5-1.5 inches. Cutout: 4.25 inch. IC Rated: suitable for direct contact with insulation. Ocularc includes a color-select switch which allows user to field select between 2700K, 3000K, 3500K, 4000K and 5000K color temperature options. Includes TIR lens. TRIAC and ELV dimming at 120V. 0-10V dimming at 277V. NOTE: Sold as new construction, but may be reconfigured in the field for remodel.

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	13W
DIMMER	Low Voltage Electronic
DIMENSIONS	4.75"W x 3.88"H x 4.75"D
INTEGRATED LED MODULE	1 x LED/13W/120-277V LED


Technical Information

APERTURE SHAPE	Square
HOUSING HEIGHT	4"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	CCT Select
LUMENS/WATT	81.54
LUMINOUS FLUX	1060 lumens



Shown in white

Sold as New Construction, may be reconfigured in the field for Remodel

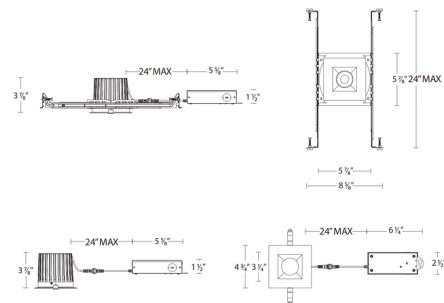

CLICK TO VIEW PRODUCT

Notes: