

Lightology

lightology.com
866-954-4489
07-04-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **AST1428434**
Approved On: _____ Approved By: _____

3IN RD Trimless Adj Downlight / Housing - Overstock

By Astro Lighting



Description

The 3 Inch Round Trimless LED Downlight and Non-IC Remodel Housing requires a remote power supply and is suitable for remodel and new construction applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Includes a 4.6 watt LED module in 2700K color temperature, 37 degree beam angle. 30 degree adjustable tilt. 360 degree rotation. 3 1/8 inch cutout. Recess depth: 5.91 inch. NOTE: Required LED driver sold separately. It is recommended using Astro Lighting's US website Driver Calculator Tool for determining recommended driver based on number of fixtures. Dimmer type dependent on driver selected.

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH White
WATTAGE 4.6W
DIMMER Dimmable
DIMENSIONS 3.11"W x 2.95"H
INTEGRATED LED MODULE 1 x LED/4.6W/120V LED
COUNTRY OF ORIGIN China

Technical Information

APERTURE SIZE 3.000"
APERTURE SHAPE Round
HOUSING HEIGHT 3"
HOUSING TYPE Remodel NON IC
CEILING TYPE Drywall Trimless/Flush
FUNCTION Adjustable Accent
BEAM ANGLE 37°
COLOR RENDERING 80 CRI
LAMP COLOR 2700K
LUMENS/WATT 114.78
LUMINOUS FLUX 528 lumens



Shown in white

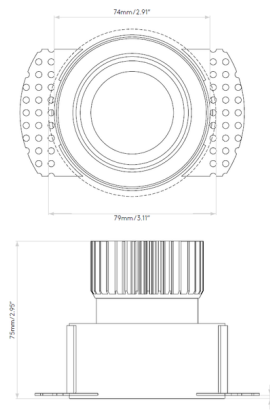

CLICK TO VIEW PRODUCT

Notes: