

# Lightology

lightology.com  
866-954-4489  
07-23-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1442301**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Light Channel 0.6 TruColor RGBTW Recessed Millwork 24V

By PureEdge Lighting



### Description

Light Channel 0.6 TruColor RGBTW Recessed Millwork Complete Fixture is a made-to order fixture featuring a minimal profile. Designed for indoor cove lighting, under cabinet, indirect lighting above cabinets, display lighting, toe kick, and general illumination. Pure Smart TruColor technology uses five channels of tunable LEDs, composed of RGBTW red, blue, green, and Tunable White (1500K-6500K), giving customers access to the warm glow of the sunset (1500K-2400K golden hour) to the pure white light of the mid-day sun (5700K) and everything in between. Light Channel requires a junction box (sold separately) and Pure Smart WiZ Pro Bridgebox (C-1RE4G-TC5W5-LC) which allows for 5-Channel, full color, wireless control of the TruColor RGBTW Light Engine with the WiZ Pro Software Suite or Pure Smart Wi-Fi Room Controller (sold separately). Available in 12 inch increments up to 120 inch with a diffused white lens or clear lens with optional black or white louver options. Fixture includes: Light Channel 0.6 Recessed Millwork, Light Channel 0.6 Recessed Millwork Assembly, 24V LED Strip, Lens, 72 Inch Light Channel Power Connector, Mounting Clips (included with every 2 feet of channel), End Caps, and End Cap Covers. Note: Required PSBR-96-24V power supply and optional accessories sold separately.

### Specifications



COLOR . . . . . Diffused Lens  
BODY FINISH . . . . . Satin Aluminum  
WATTAGE . . . . . 5W  
DIMMER . . . . . N/A  
DIMENSIONS . . . . . 12.85"L x 0.8"W x 0.61"H  
INTEGRATED LED MODULE . . . . . 1 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 96 CRI  
LAMP COLOR . . . . . RGB+White  
LUMENS/WATT . . . . . 30.40  
LUMINOUS FLUX . . . . . 152 lumens



Shown in satin aluminum / diffused lens

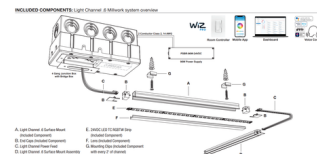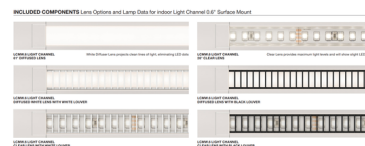

CLICK TO VIEW PRODUCT

Notes: