

Lightology

lightology.com
866-954-4489
04-25-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1459702**
 Approved On: _____ Approved By: _____

Reveal Wall Wash 2 TruColor RGBTW Plaster-In LED System 24V

By PureEdge Lighting



Description

Reveal TruColor RGBTW (RGB + Tunable White) Wall Wash, a 24VDC linear made to order LED system, features a shallow plaster-in extrusion that recesses into 5/8 inch drywall. This innovative system washes the wall from the very top of the ceiling highlighting the wall with continuous illumination. Pure Smart TruColor technology uses five channels of tunable LEDs composed of RGBTW red, blue, green, and Tunable White (1500K-6500K). Reveal is sold in 12 inch increments and may be field cut to any length. Available Options: 5 Watt: 5 Watts RGB + 5 Watts Tunable White (up to 20 feet) 7 Watt: 5 Watts RGB + 7 Watts Tunable White (up to 12 feet) 10 Watt: 5 Watts RGB + 10 Watts Tunable White (up to 10 feet) System includes: Junction Box with Adjustable Mounting Bars, Reveal Wall Wash Channel(s), Power Feed End Cap, Junction Box Cover, Dead End Cap, Take-Up Box, Drywall Screws, LED Soft Strip and Lens. NOTE: Order PSBR Remote Power Supply and Bridgebox (CV or UR sold separately) or PSBB power supply (includes Bridgebox). The Reveal Wall Wash with TruColor RGBTW light engine requires Pure Smart controls for operation.

Specifications


COLOR	N/A
BODY FINISH	Satin Aluminum
WATTAGE	5W
DIMMER	N/A
DIMENSIONS	12"L x 3.63"W x 0.87"H
INTEGRATED LED MODULE	1 x LED/5W/24V LED

Technical Information


COLOR RENDERING	95 CRI
LAMP COLOR	RGB+White
LUMENS/WATT	39.20
LUMINOUS FLUX	196 lumens



Shown in satin aluminum



INCLUDED COMPONENTS

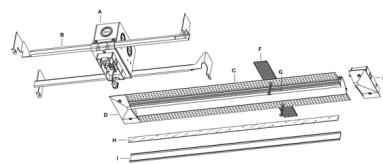

- A. JUNCTION BOX**
Mount behind drywall with Adjustable Mounting Bars. Requires that all conductors be run from Pure Smart Remote Power Supply (sold separately) to junction box. Single Gang Junction Box spacing is required for the channel and required at the beginning of each run.
- B. ADJUSTABLE MOUNTING BARS**
Provides flexibility for mounting in a variety of spaces and orientations. May be secured to wires or studs that are spaced 12" apart.
- C. REVEAL WALL WASH CHANNEL**
1/2" deep extrusion houses a single row of commercial-grade White or Dynamic Color Changing LED Strip.
- D. POWER FEED END CAP WITH COVER**
Provides a finished look and prevents light leak at feed end of run.
- E. TAKE UP BOX**
Prevents light leak at end of run by tucking excess LED Strip safely behind wall.
- F. MOUNTING STRIP**
For use when channel is between studs.
- G. DRYWALL SCREWS**
Screws channel to channel and stud.
- H. LED STRIP**
(Black Side shown) Your selection of LED Strip CCT.
- I. LENS**
0.12" wide diffuser lens projects a clean line of light without LED position.



CLICK TO VIEW PRODUCT

Notes: