Lightology

lightology.com
866-954-4489
10-29-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG1530740**

Approved On: Approved By:

Verge Wall Warm Dim Plaster-In System

By PureEdge Lighting


Description

Verge Wall Warm Dim is a slim, plaster-in aluminum channel with 4 inch paintable aluminum backer plate. Verge Wall creates and highlights the transition space where two drywall surfaces join together while emitting ambient illumination. Verge Warm Dim Wall is sold in 5 foot increments up to 40 feet and may be field cut to any length. Available in Warm Dim 27D (2700-1800K) or 30D (3000-1800K) color temperature. Verge requires a Universal (UNI) power supply, sold separately. UNI power supply compatible with TRIAC, ELV and 0-10V dimming. Required power supply, dimmer control, and optional accessories sold separately. Product is built to order. Included Components: Junction Box, Adjustable Mounting Bars, Backer Plate, Verge Wall Channel(s), Drywall Screws, LED Strip, and Lens(es)



Shown in white



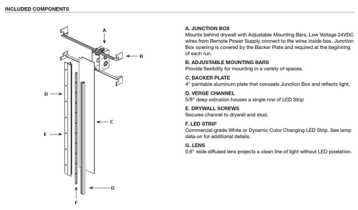

Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	25W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 1.75"W x 4"H
INTEGRATED LED MODULE	5 x LED/5W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	94 CRI
LAMP COLOR	2700K Warm Dim
LUMENS/WATT	199.00
LUMINOUS FLUX	995 lumens

CLICK TO VIEW PRODUCT

Notes: