

# Lightology

lightology.com  
866-954-4489  
04-25-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG1532962**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## DIY Reveal Wall Wash 2 Channel and Lens By PureEdge Lighting



### Description



The DIY (Do-It-Yourself) Reveal Wall Wash 2 illuminates the wall from the top of the ceiling to the floor and recesses within 5/8 inch drywall without the need for joist modification. Multiple runs of channel mount flawlessly together and may wrap inside corners to wash surrounding walls with uniform controlled illumination. The slim channel extrusions and lenses are sold in 8 foot increments, are field cuttable, and run as long as 40 feet before re-feeding. The LED strip is available in a variety of Static White color temperatures from 2400K to 4000K, Warm Dim (27D or 30D), Tunable White (2K6K or 27K6), Dynamic RGB, RGB + White, and Trucolor RGBTW Color Changing RGB with Tunable White (1500K-6500K). The LED strips are ordered in 1 foot increments, and can be cut every 2.4 inch, 3 inch, or 4 inch, depending on the color temperature selection. Included Components: Reveal Wall Wash channel and lens, junction box, adjustable mounting bars, mounting straps (one for every 3 feet of channel), and drywall screws. Required power supplies, LED strip, power feed (center or end), L-shaped inside or outside corner connector, straight connectors, and end caps are sold separately. See LED strip for required power supplies and controls

### Specifications

COLOR	N/A
BODY FINISH	Satin Aluminum
WATTAGE	N/A
DIMMER	N/A
DIMENSIONS	96"L x 3.63"W x 0.87"H
BULB	N/A



Shown in satin aluminum

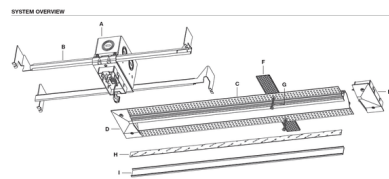

- A. JUNCTION BOX**  
Mounts service panel with adjustable mounting bars, and includes a drywall bracket for accurate installation. Low Voltage 240VAC wires from Remote Power Supply connect to LED wires inside box. Junction Box opening is coordinated with the Reveal Junction Box cover and is required at the beginning of each run.
- B. ADJUSTABLE MOUNTING BARS**  
Provide flexibility for mounting in a variety of spaces.
- C. REVEAL WALL WASH 2 CHANNEL**  
2" channel recesses houses a single row of commercial-grade White or Dynamic Color Changing LED Strip.
- D. POWER END CAP WITH COVER**  
Provides a connection area for 240VAC wires at beginning of run where LED Strip begins channel.
- E. TAKE UP BOX**  
Coordinates Junction Box opening. Required at the beginning of each run.
- F. MOUNTING STRAP**  
For use when mounting between studs, place behind drywall. One strap included for every 3 feet.
- G. DRYWALL SCREWS**  
Screws attached to drywall and stud.
- H. LED STRIP**  
Strip (Side Mount) commercial-grade White or Dynamic Color Changing LED Strip. See lamp data on for additional details.
- I. LENS**  
Diffused white lens projects a clean line of light without installation.



CLICK TO VIEW PRODUCT

Notes: