



**BRAND**

Leucos

**DESCRIPTION**

Ony Recessed New Construction Housing features a Crystal or Satin White glass diffuser that twists into the housing. Compatible with most ceiling types including plaster, gypsum board, wood, and suspended systems. Mounting bars are included. Includes trim, housing, and transformer. IC designation indicates that the housing can / will be covered with insulation. Damp location listed.




<b>TRIM COLOR</b>	Clear
<b>BODY FINISH</b>	N/A
<b>WATTAGE</b>	35W
<b>DIMMER</b>	Low Voltage Electronic
<b>DIMENSIONS</b>	5.5"W x 2.25"H
<b>BULB NOT INCLUDED</b>	
<b>LAMP</b>	1 x MR16/GU5.3 (bipin)/35W/12V Halogen

*Technical Information*

<b>LAMP COLOR</b>	2700K
<b>FUNCTION</b>	Decorative
<b>CEILING TYPE</b>	Drywall with Trim
<b>HOUSING TYPE</b>	New construction IC
<b>HOUSING HEIGHT</b>	6"
<b>APERTURE SHAPE</b>	Round


**SPEC #** LEU185412

**LO-VOLTAGE - NEW CONSTRUCTION**

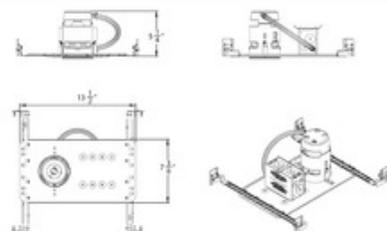

- Cutout diameter: Ø 4 1/2"
- Perfect fit to ceiling, no light leakage
- Requires a 7" clearance beyond the ceiling level
- Must be installed 3" from any insulating material
- Maximum ceiling thickness: 3/8"

**LO-VOLTAGE - INSULATED CEILING**

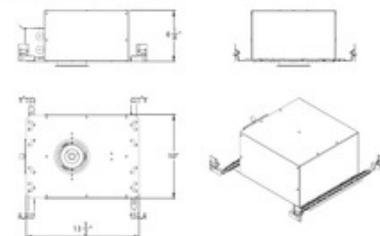

- Cutout diameter: Ø 4 1/2"
- Perfect fit to ceiling, no light leakage
- Maximum ceiling thickness: 1 1/2"
- Housing bars extended from 30" to 24 1/2" to fit in most ceiling structures.

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE