




**BRAND**

Lightolier by Signify

**DESCRIPTION**

Lytecaster 1100DAICM 6.75 Inch Incandescent Insulated Ceiling AirSeal Frame-In Kit is made of galvanized steel. UL listed for direct contact with thermal insulation (IC designation). AirSeal housing minimizes air leakage to less than 2CFM at 1.57 PSF and reduces heat loss and condensation in ceiling. Accommodates all ceilings up to 1 inch thick. 3/8 inch deep integral lip. Four slots are positioned 90 degrees apart to simplify alignment. Push-in/twist-out rotoclips hold reflector flush to ceiling. UL listed for maximum of six No. 12 gauge 90 degree C through branch circuit conductors. Quick release cover for outside access to wiring. Mounting bars extend to accommodate 16 to 24 inch on center joist spacing and feature integral nail for secure attachment to wood construction. UL listed. Suitable for damp locations. Dimensions: 15.5 inch width x 9.25 inch height. Incandescent lamp and wattage dependent on trim kit. A complete fixture includes a frame-in kit and trim kit, sold separately.

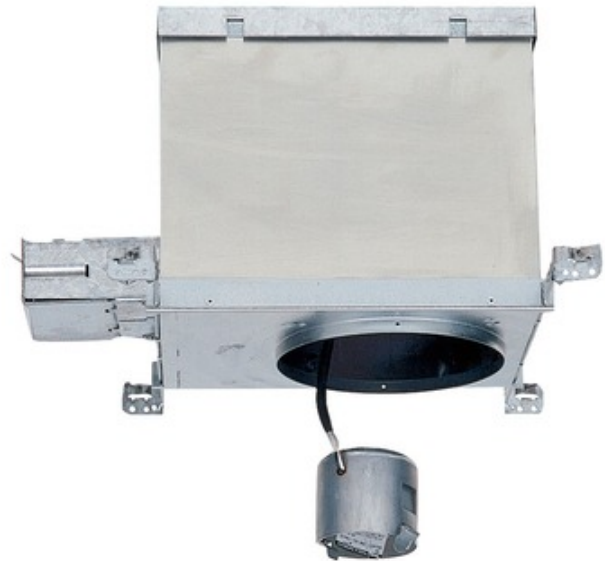

<b>TRIM COLOR</b>	N/A
<b>BODY FINISH</b>	Galvanized Steel
<b>WATTAGE</b>	72W
<b>DIMMER</b>	Standard 120V
<b>DIMENSIONS</b>	15.5"W x 9.25"H
<b>BULB NOT INCLUDED</b>	
<b>LAMP</b>	1 x A19/Medium (E26)/72W/120V Incandescent 1 x PAR38/Medium (E26)/120V Halogen 1 x BR40/Medium (E26)/120V Incandescent 1 x BR30/Medium (E26)/120V Incandescent 1 x A19/Medium (E26)/120V LED

*Technical Information*

<b>CEILING TYPE</b>	Drywall with Trim
<b>HOUSING TYPE</b>	New construction IC Airtight
<b>HOUSING HEIGHT</b>	9"

**SPEC #** LTL19055

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE