



BRAND

Juno Lighting

DESCRIPTION

TC928R 6 Inch Slope Ceiling Non-IC Remodel Housing for use in slope ceiling applications with a 7/12 to 12/12 pitch (30 to 45 degrees) where the back side of ceiling is not accessible. Installs through an opening in ceiling from below. Adjustable fixture height between 7 3/8 inch minimum to 9 inch maximum. For 2x8 or 2x10 construction. Secures in place with factory supplied remodel clips. Designed for use in non-insulated areas. If installed where insulation is present, the insulation must be pulled back 3 inches from all sides of the housing. Adjustable to position lamp perpendicular to floor. One 120 volt, PAR38, PAR30, BR30, PAR16 or A19 medium base halogen/incandescent or LED equivalent lamp is required, but not included. Halogen and incandescent lamps dimmable using a standard incandescent dimmer. Consult lamp manufacturer for dimmer compatibility when using an LED equivalent lamp. Lamp type and wattage dependent upon housing/trim combination (see attached Juno manufacturer specification). UL listed for through-branch wiring, damp locations and IP. Wet location approved for covered ceiling applications. 14 inch length x 7.4 inch width x 9 inch height. A complete fixture includes a housing and trim, sold separately.





Shown in: White

TRIM COLOR	N/A
BODY FINISH	White
WATTAGE	150W
DIMMER	Standard 120V
DIMENSIONS	14"L x 7.375"W x 9"H
BULB NOT INCLUDED	
LAMP	1 x PAR38/Medium (E26)/150W/120V Halogen
	1 x PAR38/Medium (E26)/120V LED
	1 x A19/Medium (E26)/120V Incandescent
	1 x A19/Medium (E26)/120V Incandescent
	1 x A19/Medium (E26)/120V LED

Technical Information

CEILING TYPE	Sloped
HOUSING TYPE	Remodel Slope NON IC
HOUSING HEIGHT	9"

SPEC #	JUN26400
---------------	----------

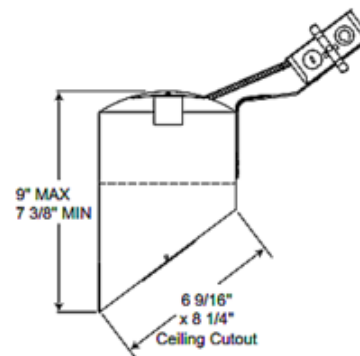

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE