




**BRAND** PureEdge Lighting

**DESCRIPTION**


The PSB-4X100W-ELV-24VDC Class 2 LED Power Supply accepts input voltage in a range of 120 volts AC and outputs 24 volts DC power up to 4x96 watts. The power supply can be used as a dimmable or non-dim power supply. Features short circuit and overload protection. Power Input: 120VAC, 50/60Hz. Power Output: Class 2, 24VDC, 4X4A, 4X96 watts maximum. For indoor applications only. To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location. Dimmable with an electronic low voltage dimmer (tested and approved: Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600, Lutron Radio RA 2, or Legrand Adorne ADTP703TU, sold separately. ETL listed. 17 inch width x 13 inch depth x 3 inch height.



|                          |                        |
|--------------------------|------------------------|
| <b>SHADE COLOR</b>       | N/A                    |
| <b>BODY FINISH</b>       | White                  |
| <b>WATTAGE</b>           | 384W                   |
| <b>DIMMER</b>            | Low Voltage Electronic |
| <b>DIMENSIONS</b>        | 17"W x 3"H x 13"D      |
| <b>BULB NOT INCLUDED</b> |                        |
| <b>LAMP</b>              | LED/384W/24V LED       |

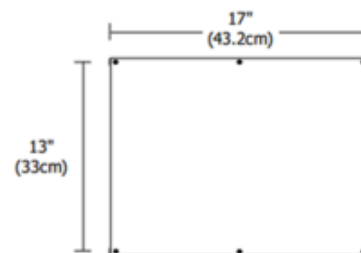

**Top View**

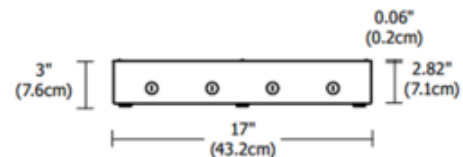

**Side View**

**SPEC #** EDG355877

|                |                |                     |                    |             |
|----------------|----------------|---------------------|--------------------|-------------|
| <b>COMPANY</b> | <b>PROJECT</b> | <b>FIXTURE TYPE</b> | <b>APPROVED BY</b> | <b>DATE</b> |
|                |                |                     |                    |             |