

Lightology

lightology.com
866-954-4489
07-04-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG356939**
Approved On: _____ Approved By: _____

Verge Wall 5W 2K4K Variable White Plaster-In System

By PureEdge Lighting



Description



Verge Wall 2K4K Variable White is a slim plaster-in aluminum channel with paintable aluminum backer plate which highlights the transition where two drywall surfaces verge together, while emitting ambient illumination. Verge houses a single row of commercial grade white LEDs available in Tunable White 2000-4000K color temperature. Consumes 5 LED watts per foot. Verge is sold in 5 foot increments up to 20 feet and may be field-cut to any length. The system requires a 24VDC electronic low voltage (ELV), 0-10V, or DMX remote power supply, controlled with a Tunable White (CDMX1) touch controller, sold separately. ETL listed. Suitable for damp locations. For indoor applications only. Fixture includes a 5 year pro-rated warranty. Included components: Junction Box, Adjustable Mounting Bars, Verge Wall Channel(s), Backer Plate, Drywall Screws, LED Soft Strip, and Lens(es). A VG-IRE-JBOX rough-in junction box is available to rough-in electrical before drywall installation (included and sold separately). Required power supply, dimmer control, and optional mounting accessories sold separately. Product is built to order.

Specifications

COLOR N/A
BODY FINISH Satin Aluminum
WATTAGE 25W
DIMMER Dimmable
DIMENSIONS 60"L x 0.62"W x 4"H
INTEGRATED LED MODULE 5 x LED/5W/24V LED

Technical Information

COLOR RENDERING 90 CRI
LAMP COLOR Tunable White
LUMENS/WATT 386.00
LUMINOUS FLUX 1930 lumens

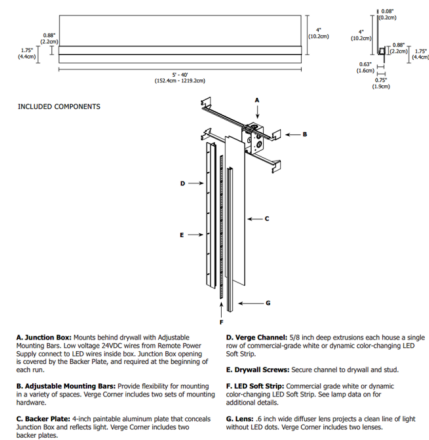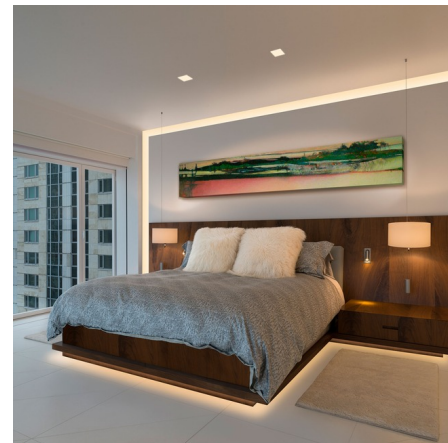

Notes: