



### BRAND

Visual Comfort Architectural

### DESCRIPTION

The 3 Inch Square 90CRI Flanged Fixed Downlight Non-IC Airtight, IC Airtight, or Chicago Plenum New Construction Housing for use with square flanged trims. Features an integral 12 watt or 17 watt LED module in three color temperature options or Warm Dim (3000K-1800K) with 10, 18, 25, 40 or 60 degree beam angle options. 3 7/8 inch ceiling cutout. Suitable for damp locations. Suitable for wet locations with shower trim. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming Note: A complete fixture requires a housing and trim, sold separately. Note: 10 degree beam angle not available for Warm Dim option.



IC AIR<sup>TM</sup>


Shown in: Matte Black

|                       |                          |
|-----------------------|--------------------------|
| TRIM COLOR            | N/A                      |
| BODY FINISH           | Matte Black              |
| WATTAGE               | 17W                      |
| DIMMER                | Low Voltage Electronic   |
| DIMENSIONS            | 12.5"W x 4"H x 9.5"D     |
| INTEGRATED LED MODULE |                          |
| LAMP                  | 1 x LED/17W/120-277V LED |

#### Technical Information

|                 |                              |
|-----------------|------------------------------|
| LUMINOUS FLUX   | 1450 lumens                  |
| LUMENS/WATT     | 85.29                        |
| LAMP COLOR      | 2700K                        |
| COLOR RENDERING | 90 CRI                       |
| BEAM ANGLE      | 25°                          |
| LAMP LIFE       | 50000 hours                  |
| FUNCTION        | Downlight                    |
| CEILING TYPE    | Drywall with Trim            |
| HOUSING TYPE    | New construction IC Airtight |

|        |           |
|--------|-----------|
| SPEC # | ELE361116 |
|--------|-----------|

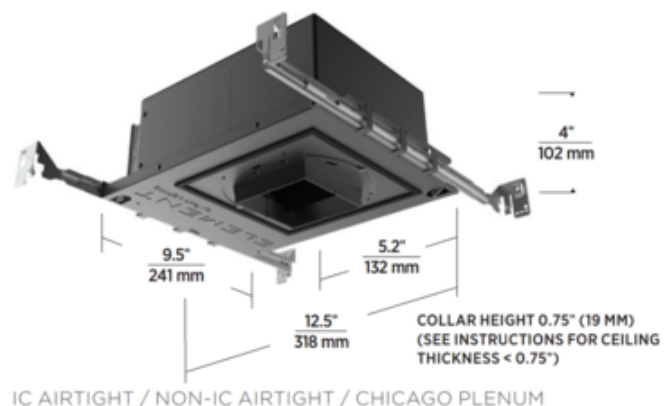

| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
|---------|---------|--------------|-------------|------|
|         |         |              |             |      |