

# Lightology

lightology.com  
866-954-4489  
05-17-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **ELE361253**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Element 3IN SQ Flanged Downlight Remodel Housing By Visual Comfort Architectural



### Description

3 Inch Square 90CRI Fixed Downlight Non-IC Remodel Housing designed for use with square flanged trims. Features high-low lamp positioning. Includes LED module in 2700K, 3000K and 3500K color temperature options in low output (12 watt) or high output (17 watt) and 10, 18, 25, 40 or 60 degree beam angle, or Warm Dim (3000K-1800K) and 18, 25, 40 or 60 degree beam angle. 3 7/8 inch cut out. Suitable for damp locations. Suitable for wet locations with shower trim option. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately. Note: Warm Dim option is not available with 10 degree beam angle.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	3.8"W x 5"H
INTEGRATED LED MODULE	1 x LED/17W/120-277V LED

### Technical Information

APERTURE SHAPE	Square
HOUSING HEIGHT	5"
HOUSING TYPE	Remodel NON IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Downlight
LAMP LIFE	50000 hours
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	85.29
LUMINOUS FLUX	1450 lumens



Shown in black

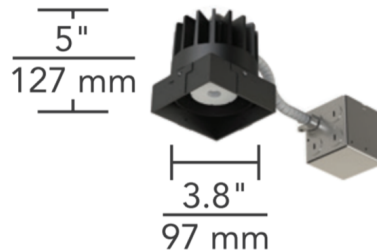

CLICK TO VIEW PRODUCT

Notes: