

# Lightology

lightology.com  
866-954-4489  
02-17-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **WAC424021**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## LEDme Square Recessed / Surface Button Light

By WAC Lighting



### Description

LEDme Square Button Lights deliver strong light output with long lasting life and performance using the latest energy efficient LED technology. Ideal for recessed or surface mounting in-cabinet or under-cabinet installations such as luxury retail displays. Made of die-cast aluminum available in Brushed Nickel, Chrome, White, Black, Dark Bronze or Copper Bronze finish. Separate outer stamp steel housing for surface mount. Includes compression springs for recessed to hold fixture firmly in place. 2 1/8 inch cut out for recessed. Beam spread glass provided for even light distribution. Includes 72 inch pre-installed lead wires that lead out through the top for connection to a remote driver and five clips for mounting. Includes six 24 volt LEDs totaling 4.8 watts, Very Warm White 2700K or Warm White 3000K color temperature, 85CRI. Replaceable LED module. Comparable to a 20 watt Xenon bulb. 70,000 hour average lamp life. Dimmable with low voltage electronic dimmer. General light distribution. Not recommended for use in ceiling. UL listed. 5 year product warranty. 2.25 inch square. 5/8 inch height recessed. 7/8 inch height surface mount. Requires Class 2 24 volt remote LED power supply. Multiple terminal block accessory for multiple output connections and frosted lens accessory available. Required power supply, optional terminal block, and frosted lens accessory, sold separately.

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . White  
WATTAGE . . . . . 4.8W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 2.25"W x 0.88"H  
INTEGRATED LED MODULE . . . . . 1 x LED/4.8W/24V LED  
COUNTRY OF ORIGIN . . . . . China

### Technical Information

LAMP LIFE . . . . . 70000 hours  
COLOR RENDERING . . . . . 85 CRI  
LAMP COLOR . . . . . 3000K  
LUMENS/WATT . . . . . 32.29  
LUMINOUS FLUX . . . . . 155 lumens



Shown in white

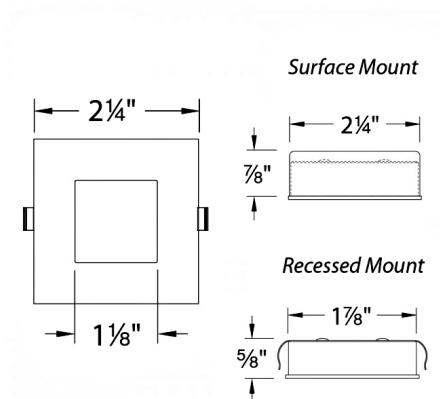

CLICK TO VIEW PRODUCT

Notes: