



BRAND

ConTech

DESCRIPTION

R2RM Non-IC StopAire Remodel Housing is a specification grade 2 inch downlight with 14 watt LED module and wall wash optic. Thermally protected for use in applications with direct contact with insulation materials. Light engine consists of a high output multi-chip LED array with precision optics available in 12 degree, 27 degree, 40 degree or wall wash beam angle options. Available with choice of 2700K, 3000K, 3500K or 4000K color temperature, 83+CRI, 1400 lumens. 50,000 hour average lamp life. The wall wash housing/trim combination utilizes a unique angled TIR optic mounted to the trim to create a smooth, uniform beam distribution. Wall wash housing is dedicated for use only with wall wash trim. cCSAus Certified to UL Standards. Energy Star. Suitable for damp locations. 9.2 inch width x 2.93 inch depth x 5.38 inch height. Dimmable per attached manufacturer dimmer compatibility reference. A complete fixture includes a housing and trim, sold separately.




TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	28W
DIMMER	Standard 120V
DIMENSIONS	9.2"W x 5.38"H x 2.93"D
INTEGRATED LED MODULE	
LAMP	2 x LED/120V LED

Technical Information

LUMINOUS FLUX	1400 lumens
LUMENS/WATT	100.00
LAMP COLOR	2700K
COLOR RENDERING	83 CRI
LAMP LIFE	50000 hours
CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	6"

SPEC # CNT468963

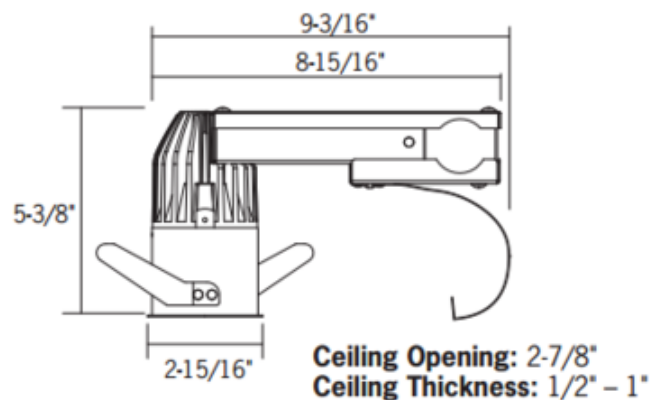

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE