Lightology

lightology.com
866-954-4489
11-09-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EUF543378**

Approved On: Approved By:

# Amigo 3 inch Multiples Adj Downlight with Trim / Remodel Housing


By Eurofase


## Description

The Amigo 3 Inch Multiples Adjustable Trim with Remodel Housing is constructed of 18 gauge powder coated steel. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. 40 degree beam angle. 30 degree tilt. ERP 3-in-1 dimmable driver included. Optional new construction Non-IC mountinig plate and new construction IC housing sold separately. TRIAC and ELV dimming at 120V. 0-10V dimming at 277V. Minimum Height Clearance: 9.5 inchDriver IncludedMax Ceiling Thickness: 1.25 inch



Shown in white

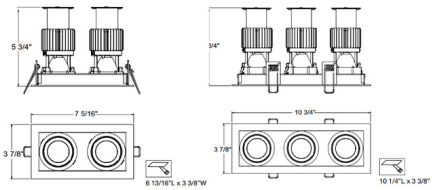


### Specifications

| | |
|---|---|
| REFLECTOR/BAFFLE COLOR | N/A |
| BODY FINISH | White |
| WATTAGE | 30W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 7.31"W x 5.75"H x 3.88"D |
| INTEGRATED LED MODULE | 2 x LED/15W/120-277V LED |
| COUNTRY OF ORIGIN | China |

### Technical Information

| | |
|---|---|
| APERTURE SIZE | 3.000" |
| APERTURE SHAPE | Square |
| HOUSING HEIGHT | 5" |
| HOUSING TYPE | Remodel NON IC |
| CEILING TYPE | Drywall with Trim |
| FUNCTION | Adjustable Accent |
| LAMP LIFE | 50000 hours |
| BEAM ANGLE | 40° |
| COLOR RENDERING | 90 CRI |
| LAMP COLOR | 3000K |
| LUMENS/WATT | 139.87 |
| LUMINOUS FLUX | 2098 lumens |

CLICK TO VIEW PRODUCT

Notes: