

Lightology

lightology.com
866-954-4489
07-03-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG569527**
Approved On: _____ Approved By: _____

TruLine 1.6A 10W 24V Warm Dim Plaster-In LED System

By PureEdge Lighting



Description


TruLine 1.6A, a versatile 24VDC linear plaster-in LED system, creates glare-free indoor architectural lighting. The 24VDC Warm Dim Plaster-In LED System recesses into 5/8 inch drywall without any joist modification. The slim extrusions, LED strips, and lenses are field-cuttable and can be ordered in 1 foot increments up to 20 feet. Includes 10 watts (2X5 watts) LED per foot with Warm Dim 2700K-2000K (27D) or 3000K-2000K (30D) color temperature options. Can be run in vertical, horizontal and diagonal directions. Product is built to order. Included components: TruLine 1.6A channel(s), LED Warm Dim 27D or 30D Soft Strip, TL1.6A Junction Box, Take-Up Box, Adjustable Mounting Bars, Mounting Strap, Power End Cap, Drywall Screw, and Lenses. System requires a 24 volt electronic low voltage (ELV) PS-60L-ELV-24VDC power supply (ELV dimming) which fits inside junction box or remote Universal (UNI) power supply (TRIAC/ELV/0-10V dimming), sold separately. Note: Required power supply, dimmer, and optional mounting components sold separately. Note: Limited quantities available.

Specifications


COLOR N/A
BODY FINISH White
WATTAGE 10W
DIMMER Low Voltage Electronic
DIMENSIONS 12"L x 3.73"W x 0.63"D
INTEGRATED LED MODULE 1 x LED/10W/24V LED

Technical Information

LAMP LIFE 50000 hours
COLOR RENDERING 92 CRI
LAMP COLOR 2700K
LUMENS/WATT 71.00
LUMINOUS FLUX 710 lumens

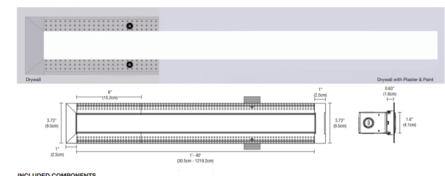

INCLUDED COMPONENTS



- A. JUNCTION BOX**
Mounts behind drywall with Adjustable Mounting Bars. Low Voltage 24VDC wires from Remote Power Supply connect to LED wires inside box. Junction Box opening is covered by the channel, and required at the beginning of each run.
- B. ADJUSTABLE MOUNTING BARS**
Provides flexibility for mounting in a variety of spaces and orientations. May be secured to studs that are spaced 12"-24" apart.
- C. TRULINE 1.6A CHANNEL**
3/8" deep extrusion housing for two rows of LED Soft Strip.
- D. POWER END CAP**
Provides a finished look and prevents light leak at feed-end of runs where LED Soft Strip enters the channel.
- E. TAKE-UP BOX**
Prevents slack spots at the end of a run by tucking excess LED Soft Strip safely behind wall.
- F. MOUNTING STRAP**
Secures channel to drywall when wall stud is unavailable.
- G. DRYWALL SCREW**
Secures channel to drywall and stud.
- H. LED SOFT STRIP**
Commercial-grade white or color-changing LED Soft Strip. TruLine 1.6A comes with two LED Soft Strips.
- I. LENS**
1.8" wide diffused white lens projects a clean line of light without LED dots.

Notes: