



BRAND

Visual Comfort Architectural

DESCRIPTION

3IN RD Flangeless Adjustable Non-IC Remodel Housing for use with flangeless trims. Features precision aiming mechanism with a 0-40 degree tilt, 361 degree rotation, and Element's high-low lamp positioning. Available in 2700K, 3000K or 3500K color temperature options or Warm Dim LED (3000K-1800K). Includes two lumen package options with 10, 18, 20, 40 or 60 degree beam angle. Suitable for wet locations with shower trim option. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately. Note: 10 degree beam angle not available for use with Warm Dim option.




Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	4"L x 4"W x 6"H
INTEGRATED LED MODULE	
LAMP	1 x LED/17W/120-277V LED

Technical Information

LUMINOUS FLUX	1476 lumens
LUMENS/WATT	86.82
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	18°
LAMP LIFE	50000 hours
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	6"

SPEC #	ELE614149
--------	-----------

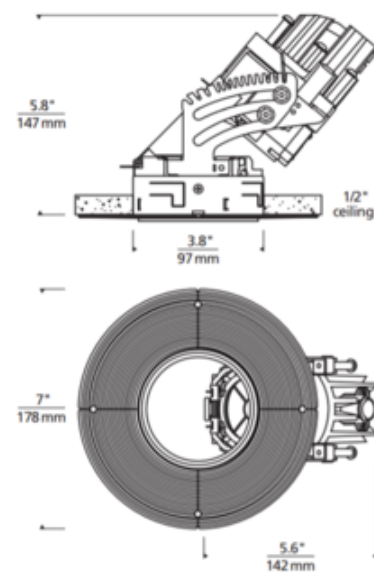

SHOWN IN ROUND FLANGELESS AT FULL TILT (45°)

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE