Lightology

lightology.com
866-954-4489
10-30-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG633733**

Approved On: Approved By:

Light Channel .3 Tunable White Surface Mount Complete


By PureEdge Lighting

Description

The Light Channel .3 Tunable White Surface Mount Complete Fixture is a slim profile channel available in 12 inch increments up to 120 inches (see attached chart for actual lengths). Finish in Satin Aluminum with a diffused lens, or a clear lens for maximum light levels. Available in a 5 watt option with 2K4K Tunable White color temperature. Tunable White 2000K-4000K (2K4K) grants independent control and adjustment of color temperature and intensity from 2000K (Sunset) through 4000K (Cool White). Included components: Light Channel .3 Surface Mount Channel, Light Channel .3 Surface Mount Assembly, 24VDC LED Lazer Strip, Lens (clear or diffused), Light Channel Power Connector, Mounting Clips (included with every 2 feet of channel), and End Caps. Note: A DMX color changing power supply or 2XK 0-10V 2-Channel power supply is required and sold separately. 0-10V requires two dimmers --one for intensity and one for color temperature. DMX power supply must be used with PureEdge controller (CDMX1-2XK). Required power supply, dimmer control, and optional mounting accessories sold separately.



Shown in satin aluminum / clear lens

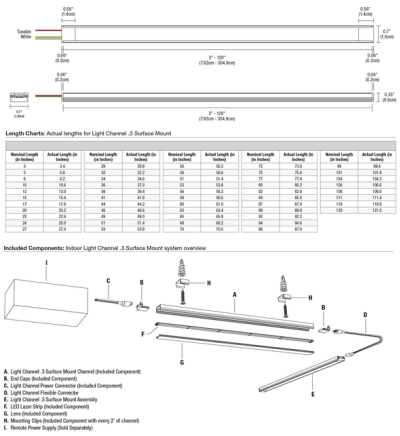

Specifications

COLOR	Clear Lens
BODY FINISH	Satin Aluminum
WATTAGE	5W
DIMMER	N/A
DIMENSIONS	12"L x 0.7"W x 0.35"H
INTEGRATED LED MODULE	1 x LED/5W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	90 CRI
LAMP COLOR	2000K-4000K Tunable White
LUMENS/WATT	46.20
LUMINOUS FLUX	231 lumens

CLICK TO VIEW PRODUCT

Notes: