Lightology

lightology.com
866-954-4489
10-29-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG635049**

Approved On: Approved By:


Light Channel .6 Surface Mount

By PureEdge Lighting

Description

The Light Channel .6 Surface Mount is a slim profile channel available in 12 inch increments up to 120 inches. Finish in Satin Aluminum with a white diffuser lens (eliminates LED dots) or a clear lens (will show LED dots) for maximum light levels, and optional louver. Available in a 2, 5 or 7 watt per foot option in 12 to 120 inch lengths with a variety of color temperature options. Requires a remote Universal driver (Triac/ ELV,/0-10V dimmable) or the PS-60L-ELV-24VDC power supply (ELV dimmable) will fit inside junction box. Product is built to order.Included components: Light Channel .6 Surface Mount, End Caps, 72 inch power connector (one per fixture-order extra as needed based upon installation requirements), Light Channel .6 Surface Mount Assembly, 24VDC LED Soft Strip, Lens, Mounting Clips (for every 2 feet of channel).Required power supply, dimmer control, and optional mounting accessories sold separately..

Shown in satin aluminum / diffused lens

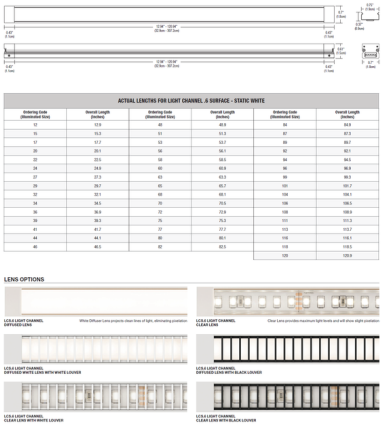

Specifications

COLOR	Diffused Lens
BODY FINISH	Satin Aluminum
WATTAGE	2W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 0.7"W x 0.61"H
INTEGRATED LED MODULE	1 x LED/2W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K
LUMENS/WATT	55.00
LUMINOUS FLUX	110 lumens

CLICK TO VIEW PRODUCT

Notes: