

Lightology

lightology.com
866-954-4489
05-25-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **NOR676362**

Approved On: _____ Approved By: _____

Opal Surface Mount / Retrofit Fixture By Nora Lighting



Description

The Opal Series 120 Volt AC LED fixture (no driver) is designed to surface mount over a standard 3 or 4 inch junction box and .50 inch deep pancake boxes for ceiling or wall mount applications. Suitable for remodel and new construction applications and is IC rated when used with a 4 inch electrical junction box rated for direct contact with insulation. The Opal is offered in two sizes with two lumen offerings and produces even illumination without diode image. Features a one piece aluminum die formed housing and trim with a white polycarbonate diffuser. The R4509 series includes a universal bracket (NLOPAC-4BKT-2). Dimmable using a TRIAC or electronic low voltage (ELV) dimmer, sold separately. Note: Not all options available. Retrofit: Each luminaire includes a retrofit kit with medium base socket adapter to mount over 4 inch or 5 inch or 6 inch recessed housings. Kit also includes torsion spring brackets that hold luminaire flush against ceiling. Retrofit kit is intended to be used with a lighting fixture as a lamp replacement.

Specifications


REFLECTOR/BAFFLE COLOR White
 BODY FINISH Natural Metal
 WATTAGE 10.5W
 DIMMER Low Voltage Electronic
 DIMENSIONS 4"W x 1.75"H
 INTEGRATED LED MODULE 1 x LED/10.5W/120V LED

Technical Information

COLOR RENDERING 90 CRI
 LAMP COLOR 4000K
 LUMENS/WATT 66.67
 LUMINOUS FLUX 700 lumens



Shown in natural metal / white

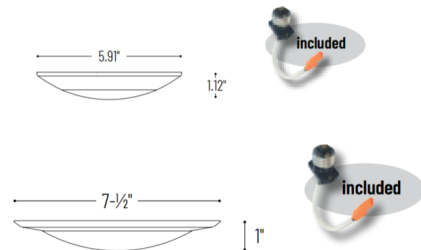

CLICK TO VIEW PRODUCT

Notes: