

Lightology

lightology.com
866-954-4489
04-25-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG716883**
 Approved On: _____ Approved By: _____

Nova Up/Down Suspension w/Remote Power/SQ Canopy

By PureEdge Lighting



Description

Nova Remote Power Up/Down Suspension with End Feed is a linear LED fixture that offers both direct and indirect light in a clean, LED dot-free smooth line of light in a contemporary style. Nova is available in various increments from 36 to 240 inches and features a diffused white 100 degree lens or clear frosted 60 degree downlight lens, optional black or white louver, 60 degree clear frost uplight lens, multiple finishes, three wattage options, and a spectrum of color temperatures. ETL listed. Title 24 compliant when used with Universal (UNI) power supply. Fixture includes a 5 year warranty. Note: Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (60 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Power supply, dimmer control, and optional accessories sold separately. Note: Includes a 4 inch square canopy and adjustable 12 foot coaxial cables (additional aircraft cables included for support when fixture exceeds 72 inches).

Specifications


COLOR	White Lens
BODY FINISH	Satin Nickel
WATTAGE	21W
DIMMER	Dimmable
DIMENSIONS	36"L x 1.24"W x 2.23"H
INTEGRATED LED MODULE	3 x LED/7W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K
LUMENS/WATT	171.00
LUMINOUS FLUX	1197 lumens



Shown in satin nickel / white lens

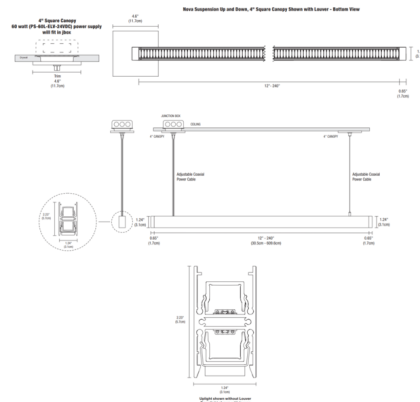

CLICK TO VIEW PRODUCT

Notes: