

# Lightology

lightology.com  
866-954-4489  
12-27-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG725014**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus D1 Linear Suspension w/Power/Center Feed

By PureEdge Lighting



### Description

The Cirrus Power D1 Lens Linear Downlight Suspension with Center Feed is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 36 to 120 inches with a 100 degree white diffused or 60 degree clear frosted direct downlight lens, optional black or white louver, a variety of finishes, three wattage options, and a spectrum of color temperature options. Includes a linear canopy (12 inch for lengths 36-96 inch / 26 inch for lengths 99-120 inch) and 12 foot adjustable coaxial cables. Additional aircraft cables provided for support when fixture exceeds 72 inches. Note: Product is built to order. Includes a 120V/24VDC Universal (UNI) LED power supply, dimmable with an electronic low voltage (ELV), Triac (magnetic) or 0-10V dimmer, sold separately.

### Specifications


COLOR . . . . . White Lens  
BODY FINISH . . . . . Satin Nickel  
WATTAGE . . . . . 15W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 36"L x 0.9"W x 0.9"H  
INTEGRATED LED MODULE . . . . . 3 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 95 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 142.80  
LUMINOUS FLUX . . . . . 714 lumens



Shown in satin nickel / white lens

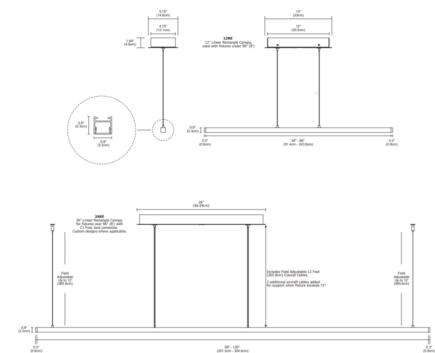

CLICK TO VIEW PRODUCT

Notes: