

# Lightology

lightology.com  
866-954-4489  
04-25-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG740230**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus D1 Linear Suspension w/Power/End Feed/Two Canopies

By PureEdge Lighting



### Description

The Cirrus Power D1 Lens Linear Downlight Suspension with End Feed and Two Canopies is a linear LED fixture that offers direct light in a clean, contemporary style. Available in a range of increments from 36 to 420 inches and features a 100 degree beam white diffused or 60 degree clear frosted direct downlight lens. optional white or black louver, multiple finishes, three wattage options, and a spectrum of color temperature options. 60 degree lens not available without louver. Chrome finish available up to 84 inch length. Includes two canopies (only one canopy contains power supply) with 120V/24VDC Class 2 low voltage LED power supply and 12 foot adjustable coaxial cables. Additional aircraft cables provided for support when fixture exceeds 96 inches. Lengths over 96 inches ship in two segments. Canopy size (4, 5 or 6 inch) and power supply wattage dependent on length of fixture. For 50 watts (Non-IC) the power supply will fit inside the electrical junction box with a flush 4.6 inch canopy. Optional accessories sold separately. Note: Product is built to order.

### Specifications


COLOR . . . . . White Lens  
 BODY FINISH . . . . . Satin Nickel  
 WATTAGE . . . . . 15W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 36"L x 0.9"W x 0.9"H  
 INTEGRATED LED MODULE . . . . . 3 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 95 CRI  
 LAMP COLOR . . . . . 2700K  
 LUMENS/WATT . . . . . 142.80  
 LUMINOUS FLUX . . . . . 714 lumens



Shown in satin nickel / white lens

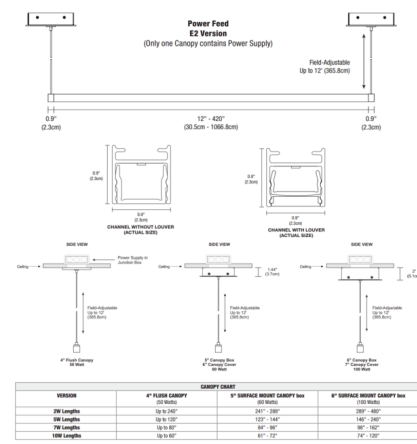

CLICK TO VIEW PRODUCT

Notes: \_\_\_\_\_