

# Lightology

lightology.com  
866-954-4489  
04-15-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG743374**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Zipp Warm Dim Ceiling with Remote Power By PureEdge Lighting



### Description

Zipp Warm Dim Ceiling Downlight with Remote Power is a linear LED fixture that offers spot-free, direct light in a clean, contemporary style. Zipp is available in a range of increments from 12 to 420 inches and features a white lens with 100 degree beam or clear frosted lens with a 60 degree beam, white or black louver, multiple finishes, 4.4 LED watts per foot, and Warm Dim 2700K to 2000K (27D) or 3000K to 2000K (30D) color temperature. Chrome finish available up to 84 inch length. Fixture includes a 5 year warranty. Required power supply, dimmer control and optional accessories sold separately. Product is built to order. Note: Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (60 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply up to 100 watts at a maximum of 40 feet away. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Power supply, dimmer control, and optional accessories sold separately. Note: Includes one square canopy and ceiling locking clips for support every 4 feet. Lengths over 96 inches ship as two segments.

### Specifications


COLOR . . . . . White Lens  
 BODY FINISH . . . . . Satin Nickel  
 WATTAGE . . . . . 5W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 12"L x 0.7"W x 0.7"H  
 INTEGRATED LED MODULE . . . . . 1 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 95 CRI  
 LAMP COLOR . . . . . 2700K Warm Dim  
 LUMENS/WATT . . . . . 52.00  
 LUMINOUS FLUX . . . . . 260 lumens



Shown in satin nickel / white lens

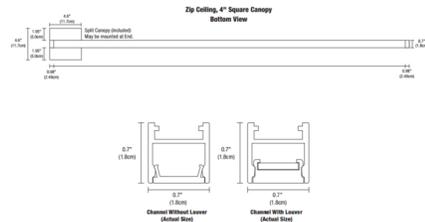

CLICK TO VIEW PRODUCT

Notes: