



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Zipp Suspension Downlight with Center Feed is a linear fixture that offers spot-free direct light in a clean, contemporary style. Available in a range of increments from 36 to 120 inches and features a white diffused lens with 100 degree beam or clear frosted lens with 60 degree beam, optional white or black louver, multiple finishes, three wattage options (Note: 2 watt not available with optional louver), and a spectrum of color temperature options. Warm Dim option includes 5 LED watts per foot available in 2700K-2000K (27D) and 3000K-2000K (30D) color temperature. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. Note: Warm Dim available in 5 watt option only. Includes a linear canopy (size dependent on length of fixture) with 120 volt input, 24VDC output Universal (UNI) power supply and 12 foot adjustable coaxial cables (additional aircraft cables for support when fixture exceeds 96 inches). Dimmable with ELV/ TRIAC/0-10V. Note: Product is built to order.




Shown in: Satin Nickel / White Lens

SHADE COLOR	White Lens
BODY FINISH	Satin Nickel
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 0.7"W x 0.7"H
INTEGRATED LED MODULE	
LAMP	3 x LED/5W/24V LED

Technical Information

LUMINOUS FLUX	396 lumens
LUMENS/WATT	79.20
LAMP COLOR	2700K
COLOR RENDERING	95 CRI

SPEC # EDG755799

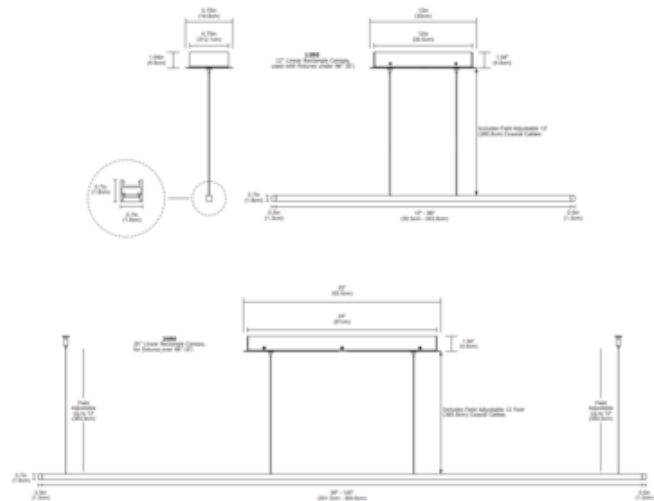

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE
