

# Lightology

lightology.com  
866-954-4489  
04-25-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG777827**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Pipeline2 Warm Dim Suspension Remote Power/4IN SQ Canopy By PureEdge Lighting



### Description

Pipeline 2 Suspension Warm Dim Downlight with Remote End Feed Power and Square Canopy is a linear LED fixture with a clean and contemporary style. Pipeline 2 is available in 12 inch increments from 36 to 240 inches (5 watt) and features a 176 degree beam spread with a 280 degree diffused white lens with optional black or white louver, a variety of finishes, and Warm Dim (27D) 2700K-1800K or (30D) 3000K-1800K color temperature options. Chrome finish available up to 84 inch length. Includes one 4 inch square canopy and 12 foot adjustable coaxial cables. Lengths over 96 inches ship as two segments. Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply up to 100 watts at a maximum of 40 feet away. Universal dimming (TRIAC/ELV/0-10V). ELV dimming with 50 Watt (PS-60L-ELV) power supply. Power supply, dimmer control, and optional accessories sold separately. Note: Product is built to order

### Specifications


COLOR . . . . . White Lens  
 BODY FINISH . . . . . Satin Nickel  
 WATTAGE . . . . . 15W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 36"L x 1.24"W x 1.24"H  
 INTEGRATED LED MODULE . . . . . 3 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 95 CRI  
 LAMP COLOR . . . . . 2700K Warm Dim  
 LUMENS/WATT . . . . . 248.40  
 LUMINOUS FLUX . . . . . 1242 lumens



Shown in satin nickel / white lens

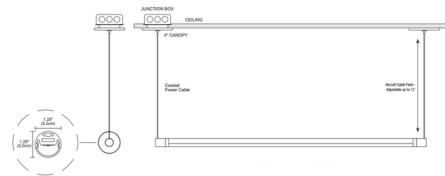

CLICK TO VIEW PRODUCT

Notes: