

Lightology

lightology.com
866-954-4489
07-04-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG777827**
Approved On: _____ Approved By: _____

Pipeline2 Warm Dim Suspension Remote Power/4IN SQ Canopy

By PureEdge Lighting



Description

Pipeline 2 Suspension Warm Dim Downlight with Remote End Feed Power and Square Canopy is a linear LED fixture with a clean and contemporary style. Pipeline 2 is available in 12 inch increments from 36 to 240 inches (5 watt) and features a 176 degree beam spread with a 280 degree diffused white lens with optional black or white louver, a variety of finishes, and Warm Dim (27D) 2700K-1800K or (30D) 3000K-1800K color temperature options. Chrome finish available up to 84 inch length. Includes one 4 inch square canopy and 12 foot adjustable coaxial cables. Lengths over 96 inches ship as two segments. Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply up to 100 watts at a maximum of 40 feet away. Universal dimming (TRIAC/ELV/0-10V). ELV dimming with 50 Watt (PS-60L-ELV) power supply. Power supply, dimmer control, and optional accessories sold separately. Note: Product is built to order

Specifications


COLOR White Lens
BODY FINISH Satin Nickel
WATTAGE 15W
DIMMER Low Voltage Electronic
DIMENSIONS 36"L x 1.24"W x 1.24"H
INTEGRATED LED MODULE 3 x LED/5W/24V LED

Technical Information

LAMP LIFE 50000 hours
COLOR RENDERING 95 CRI
LAMP COLOR 2700K Warm Dim
LUMENS/WATT 248.40
LUMINOUS FLUX 1242 lumens



Shown in satin nickel / white lens

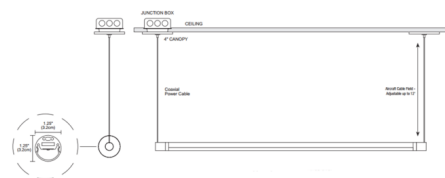

CLICK TO VIEW PRODUCT

Notes: