Lightology

lightology.com
866-954-4489
11-07-26

Project:

Company:

Location: Fixture Type:

SPEC #: **ELE780740**


Approved On: Approved By:

# Reflections Dune Indirect Downlight / Remodel Housing


By Visual Comfort Architectural

## Description

The Reflections Dune Remodel Housing with Flanged or Flangeless ceiling plane options combine decorative recessed domes with indirect LED illumination. Flanged for a more traditional ceiling appearance or flangeless for a smooth, mud-in ceiling appearance. Available in 5, 8 and 12 inch diameter options, the domes act as reflectors to a completely hidden ring of up-firing LEDs. Flanged trims accommodate a .50 to 1 inch ceiling thickness. Flangeless includes an integral mud plate. IC remodel housing (suitable up to R60 spray foam insulation) with a remote junction box. Universal 120V-277V. Supplied with a constant current driver. Dimmable to 5 percent with an electronic low voltage, Triac, or 0-10V dimmer, sold separately.

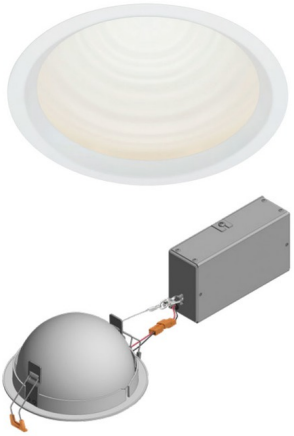

Shown in white

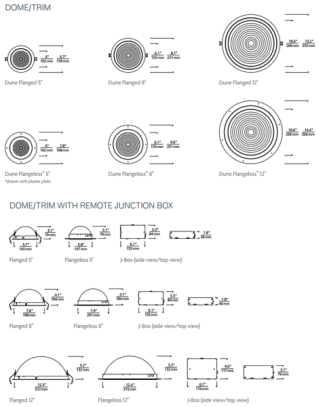


### Specifications

| | |
|---|---|
| REFLECTOR/BAFFLE COLOR | N/A |
| BODY FINISH | White |
| WATTAGE | 9W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 5"W x 3.1"H |
| INTEGRATED LED MODULE | 1 x LED/9W/120V LED |

### Technical Information

| | |
|---|---|
| APERTURE SIZE | 5.000" |
| APERTURE SHAPE | Round |
| HOUSING HEIGHT | 4" |
| HOUSING TYPE | Remodel IC |
| CEILING TYPE | Drywall with Trim |
| FUNCTION | Decorative |
| LAMP LIFE | 50000 hours |
| COLOR RENDERING | 90 CRI |
| LAMP COLOR | 2700K |
| LUMENS/WATT | 76.00 |
| LUMINOUS FLUX | 684 lumens |

CLICK TO VIEW PRODUCT

Notes: