

Lightology

lightology.com
866-954-4489
07-05-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG796359**
Approved On: _____ Approved By: _____

Pipeline 1 Up or Down Warm Dim Remote Power/4IN SQ Canopy

By PureEdge Lighting



Description

Pipeline 1 Up or Down Warm Dim Suspension with Remote Power End Feed and 4 Inch Square Canopy is a linear LED fixture with a clean and contemporary style. Pipeline 1 is available in various increments from 36 to 240 inches and features a 176 degree beam spread, a diffused white lens, optional black or white louver, a variety of finishes with Nickel hardware, 5 LED watts per foot, and Warm Dim 2700K-2000K (27D) and 3000K-2000K (30D) color temperature. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. Fixture includes a 5 year warranty. Product is built to order. Note: Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (60 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a remote Universal (UNI) power supply. Required power supply and dimmer control sold separately. Note: Includes one 4 inch square canopy and 12 foot adjustable coaxial cables. Additional aircraft cables included for support when fixture exceeds 72 inches.

Specifications


COLOR White Lens
BODY FINISH Satin Nickel
WATTAGE 15W
DIMMER Low Voltage Electronic
DIMENSIONS 36"L x 1.25"W x 1.25"H
INTEGRATED LED MODULE 3 x LED/5W/24V LED

Technical Information

LAMP LIFE 50000 hours
COLOR RENDERING 95 CRI
LAMP COLOR 2700K Warm Dim
LUMENS/WATT 248.40
LUMINOUS FLUX 1242 lumens



Shown in satin nickel / white lens

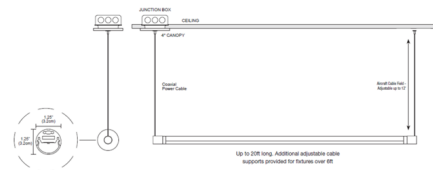

CLICK TO VIEW PRODUCT

Notes: