

Lightology

lightology.com
866-954-4489
12-28-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG880253**
Approved On: _____ Approved By: _____

Big-Shorty Uplight / Spotlight

By PureEdge Lighting



Description


The BIG-Shorty Uplight/Spotlight yields BIG illumination in a shorty profile. The BIG-shorty offers an adjustable floor lamp that incorporates a 12 volt LED MR16 lamp. Adjustable up to 90 degrees. Finish in Satin Nickel, Black or White. Features an integral 12 volt plug-in LED driver with soft start short circuit and overload protection. Class 2, 10 watt max. Input: 120VAC, 0.6A 50/60Hz. Output: 12VAC, 0.08A Max. Dimmable with an electronic low voltage wall dimmer, sold separately. UL listed. Hexcell louver, snoot and beam spreader film optical accessories sold separately. Available in Warm Dim 27D (2700K to 1800K) and 30D (3000K to 1800K) color temperature with Narrow Flood, Flood, or Wide Flood and Very Wide Flood (with lens film) beam spread options.

Specifications

COLOR N/A
BODY FINISH White
WATTAGE 8W
DIMMER Low Voltage Electronic
DIMENSIONS 2.36"W x 4.5"H
BULB INCLUDED 1 x MR16/GU5.3 (bipin)/8W/12V LED

Technical Information

BEAM ANGLE 25°
COLOR RENDERING 95 CRI
LAMP COLOR 3000K
LUMENS/WATT 61.25
LUMINOUS FLUX 490 lumens

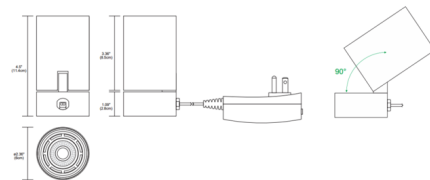

Notes: